


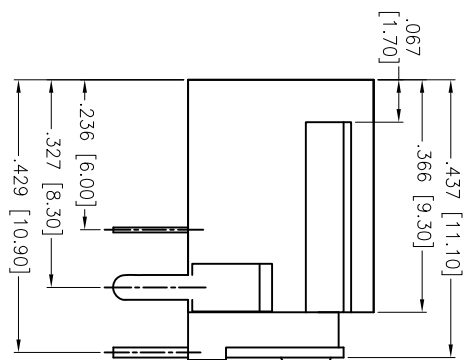
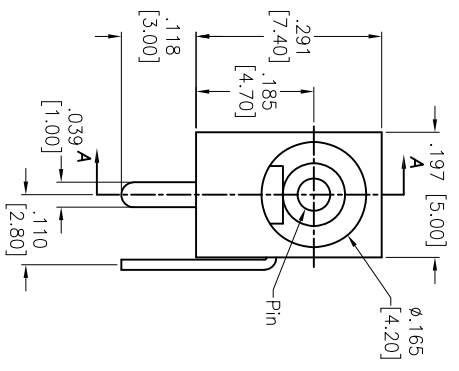
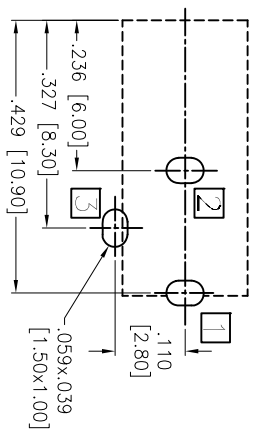
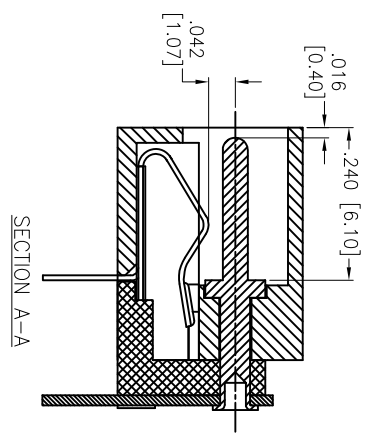


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/6/14	

APPROVED: _____
 DATE: _____ TITLE: _____



PART NO.	CENTER PIN DIA.	DC PLUG O.D.
ADC-007M-3-T-HT-T/R	.039 [1.00]	.138 [3.50]
ADC-007M-4-T-HT-T/R	.051 [1.30]	.138 [3.50]
ADC-007M-8-T-HT-T/R	.026 [0.65]	.093 [2.35]



PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DC POWER JACK, 1.00mm, 1.30mm, 0.65mm
 CENTER PIN, RIGHT ANGLE PCB MOUNT

SPECIFICATIONS:

- Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
- Insulator color: Black
- Center Pin: Brass, Nickel plated
- Contacts: Brass
- Plating: Tin over Nickel underplate overall
- Electrical: Operating voltage: 30V DC
- Current rating: 1A
- Contact resistance: 50 mohms max. initial
- Insulation resistance: 100 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -20°C to +70°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN AY	8/6/14
CHECKED AC	8/6/14
APPROVED	

REF: S0002C	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. ADC-007M-X-T-HT-T/R	REV. -