

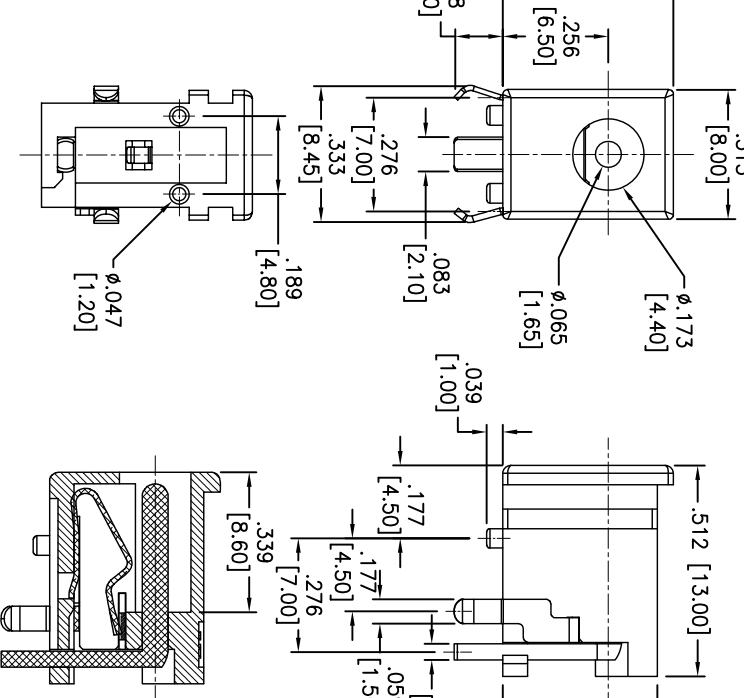
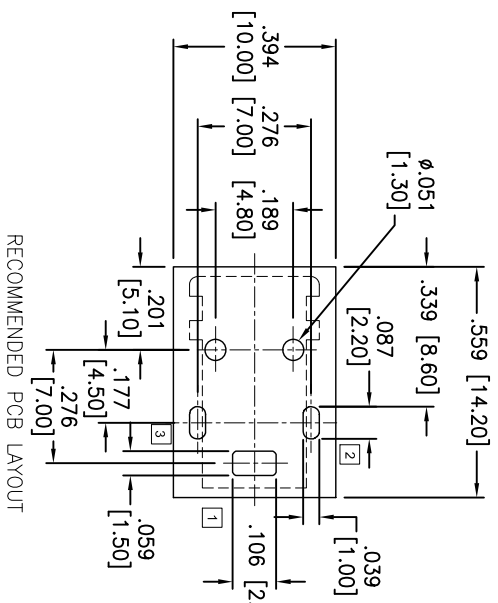


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/24/12	

APPROVED: _____ TITLE: _____
 DATE: _____

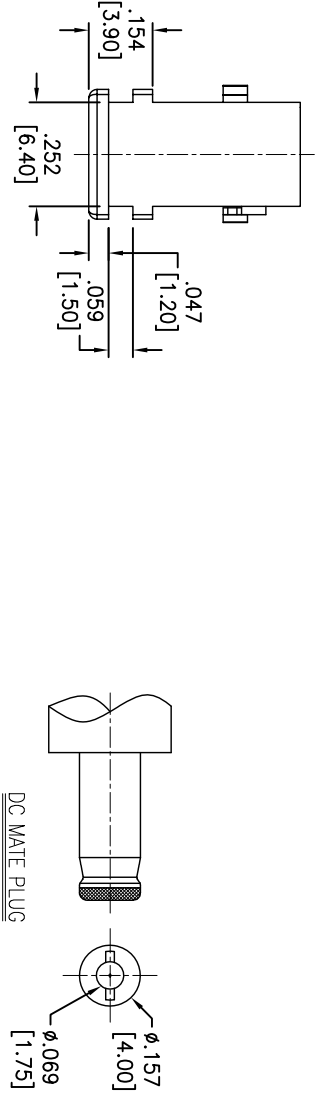

SPECIFICATIONS:
 Material: Insulator: PA66, rated UL 94V-0
 Insulator color: Black
 Center Pin: Brass
 Terminal: Copper Alloy
 Spring: Copper Alloy
 Plating: Silver over Nickel underplate
 Electrical: Operating voltage: 16 VDC max.
 Current rating: 3 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating Temperature: -20°C to +70°C
 Environmental: Lead free, RoHS compliant

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
X	± .10
XX	± .020
XXX	± .015
ØX	± .10
ØXX	± .015
ØXXX	± .010
APPROVALS	
DRAWN	AY
CHECKED	CC
APPROVED	

TITLE	
DC POWER JACK, 1.65mm CENTER PIN	
SIZE	PART NO.
X	ADC-013C-9
REF:	S00002C
SCALE:	NTS
SHEET	1 OF 1
REV.	-