

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/11	

6

5

4



3

2


1

APPROVED: _____ TITLE: _____

DATE: _____

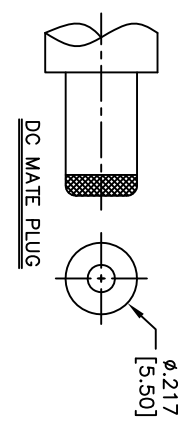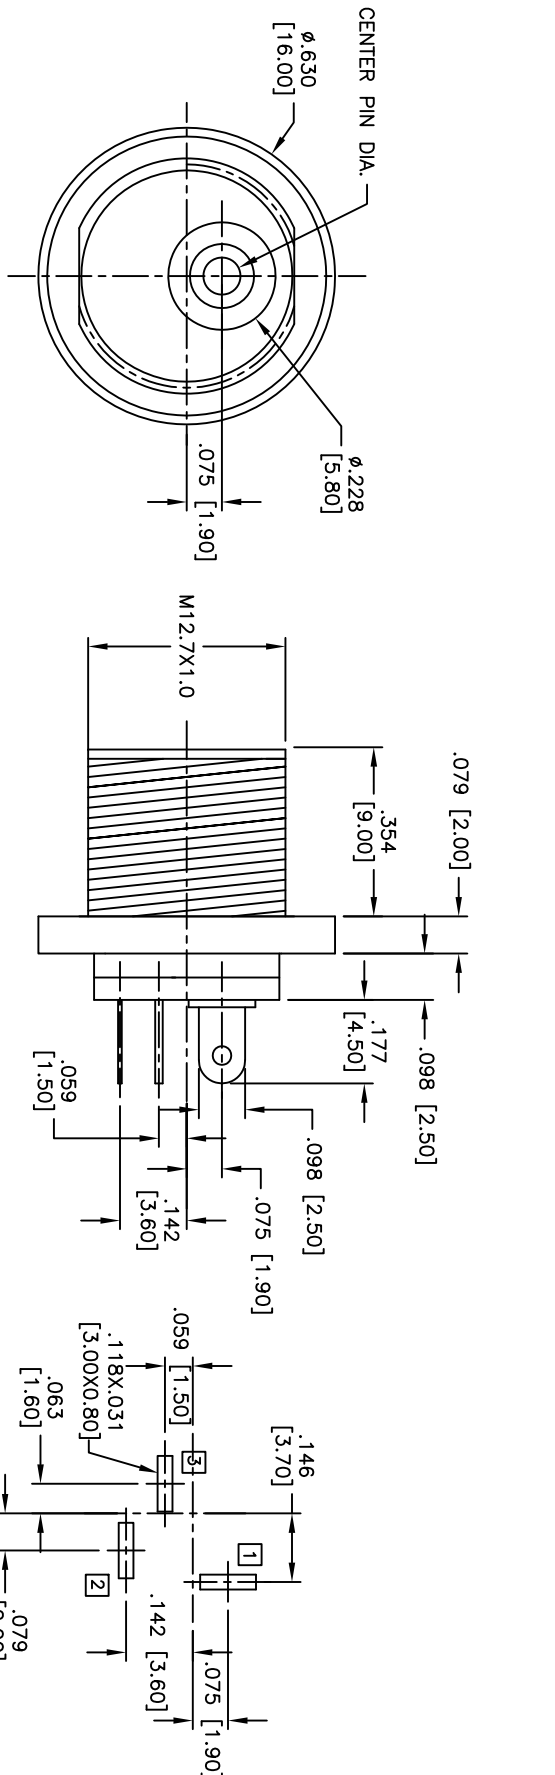

PART NO.	CENTER PIN DIA.
ADC-016-1	$\phi 0.079$ [2.00]
ADC-016-2	$\phi 0.098$ [2.50]
ADC-016-5	$\phi 0.093$ [2.35]



SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Center Pin: Brass, Nickel plated
 Contacts: Brass
 Plating: Tin over Copper underplate

Electrical: Operating voltage: 30 VDC max.
 Current rating: 1 Amps max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 100 Mohms min.
 Withstand voltage: 500 VAC

Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DC POWER JACK, 2.00mm, 2.35mm, 2.50mm CENTER PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	2/21/11
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	ADC-016-X	-

REF:	SCALE:	NTS	SHEET	1 OF 1
S0002C				

6

5

4

3

2

1