
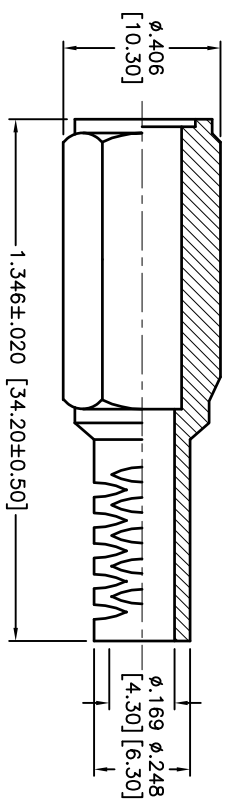

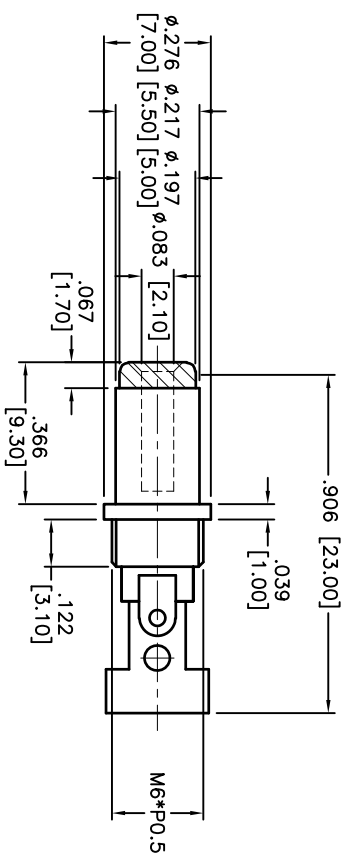


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/6/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

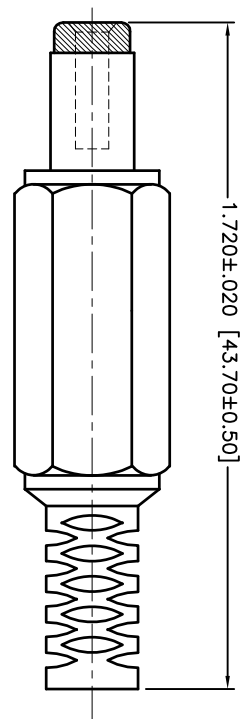

SPECIFICATIONS:  
 Material:  
 Hosing: PE, Color: Black  
 Insulator: PA66, Glass reinforced, Color: Black  
 Insulator Ring: ABS, Color: Black  
 Contacts: Brass, Nickel plated  
 Outer Sleeve: Brass, Nickel plated  
 Inner Barrel: Brass, Nickel plated

Electrical:  
 Contact Resistance: 30m Ohms max  
 Insulation Resistance: 100M Ohms min @ dc 500V  
 Dielectric Withstanding Voltage: AC 500V for 1 min.  
 Environmental:  
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ±.10 Ø.X ±.10  
 .XX ±.020 Ø.XXX ±.015  
 .XXX ±.015 Ø.XXXX ±.010

**ADAM TECH**  
 909 Ratway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**2.00MM DC PLUG, W/ STRAIN RELIEF**

DRAWN	AY	9/6/12	SIZE	PART NO.	REV.
CHECKED	AH	9/6/12	X	ADP-.083/.217/.366-SR	.
APPROVED			REF:	S00062T	SCALE: NTS

