

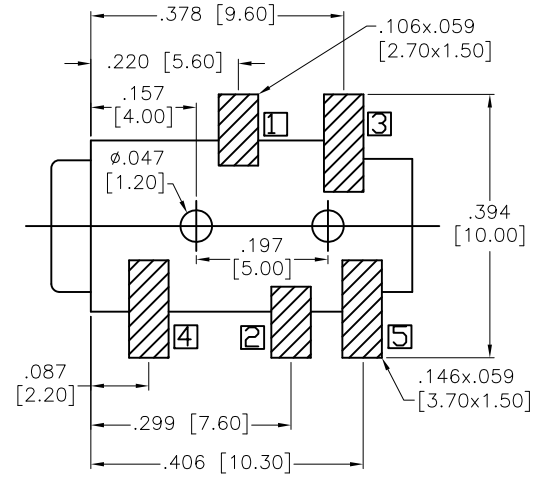
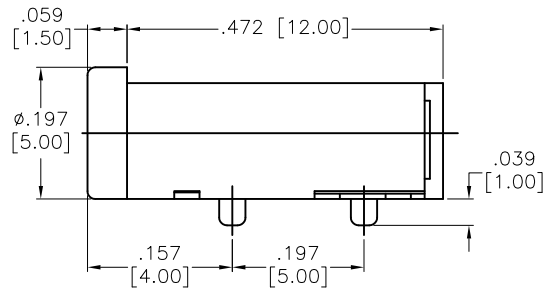
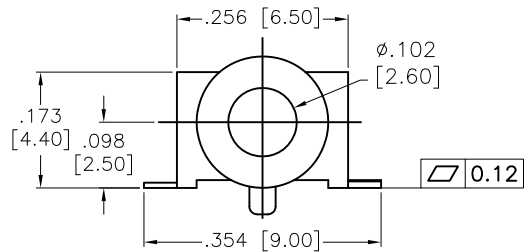


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/16/11	

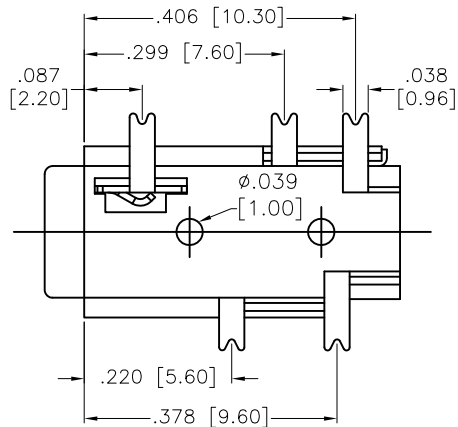

RECOMMENDED PCB LAYOUT

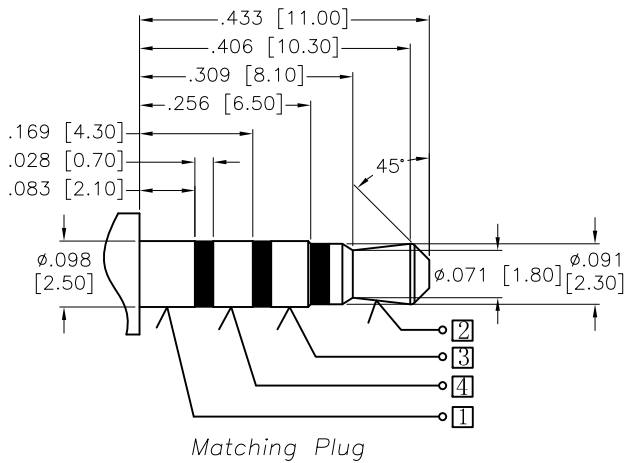

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Spring: Copper Alloy
 Contacts: Brass
 Plating:
 Gold flash over Copper underplate
 Electrical:
 Operating voltage: 30 VDC max.
 Current rating: 0.5 Amp max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



P/N	ASJ-103-J	ASJ-103-M
Schematic code		

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN	TW	12/16/11	
CHECKED	AY	12/16/11	
APPROVED			
TITLE		STEREO PHONE JACK, 2.5mm	
SIZE	PART NO.	REV.	
X	ASJ-103-X	-	
REF:	S00002C	SCALE:	NTS
		SHEET 1 OF 1	

6 5 4 3 2 1

D

D

C

C

B

B

A

A

6 5 4 3 2 1