

6

5

4

3


2

1


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/7/15	

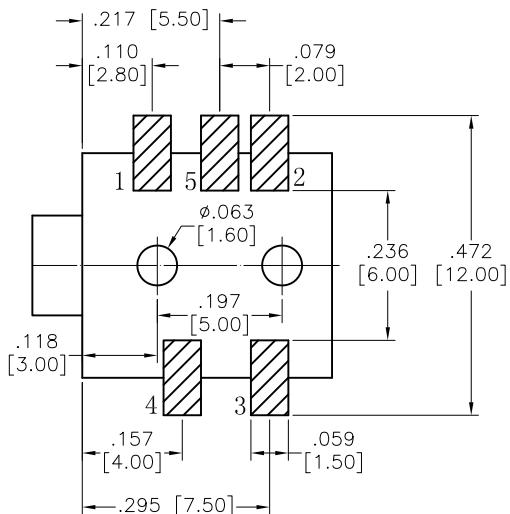

RECOMMENDED PCB LAYOUT

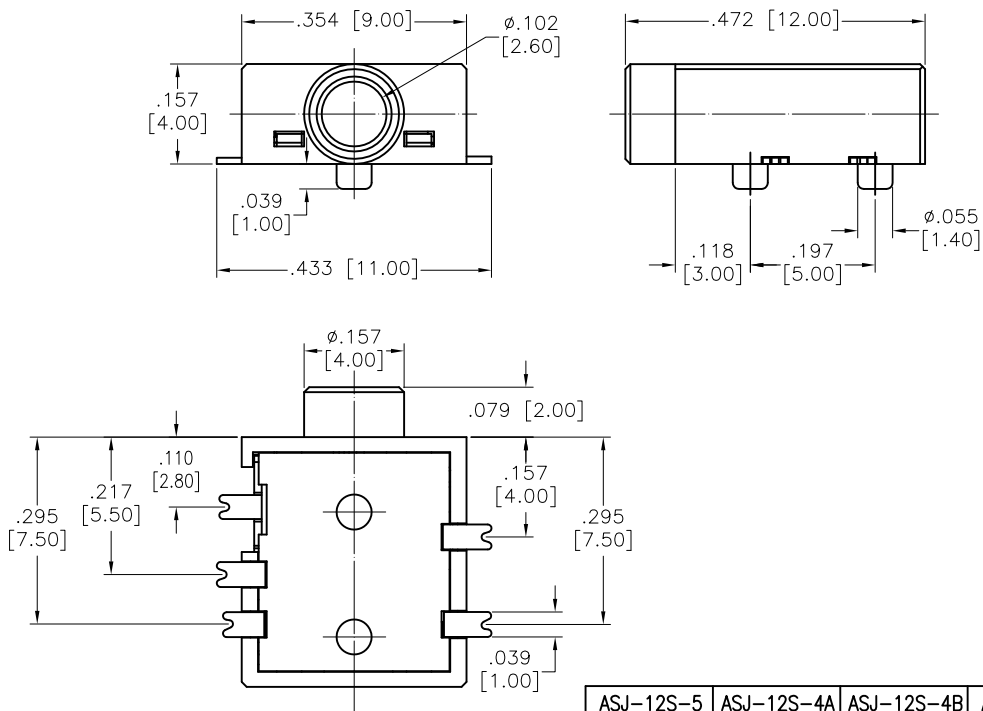

ASJ-12S-5	ASJ-12S-4A	ASJ-12S-4B	ASJ-12S-3	ASJ-12S-3A

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Cover: Hi-temp thermoplastic, rated UL 94V-0, color: Black

Contact: Copper Alloy

Plating:

Silver over Copper underplate overall

Electrical:

Voltage rating: 30 VDC

Current rating: 0.5 A

Contact resistance: 0.05 Ω max.

Insulation resistance: 100 MΩ min. @ 250 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ± .10 Ø.X ± .10  
 .XX ± .020 Ø.XX ± .015  
 .XXX ± .015 Ø.XXX ± .010

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	HR	8/7/15
CHECKED	CH	8/7/15
APPROVED		

TITLE		
STEREO PHONE JACK, 2.5mm		
SIZE	PART NO.	REV.
X	ASJ-12S-XX	-
REF: S00102C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1