


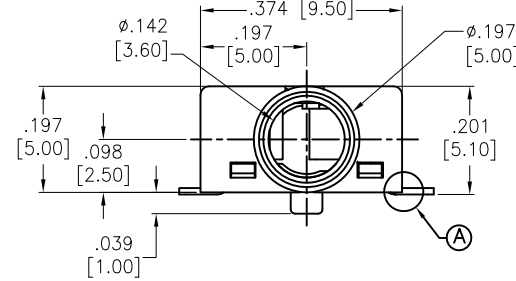
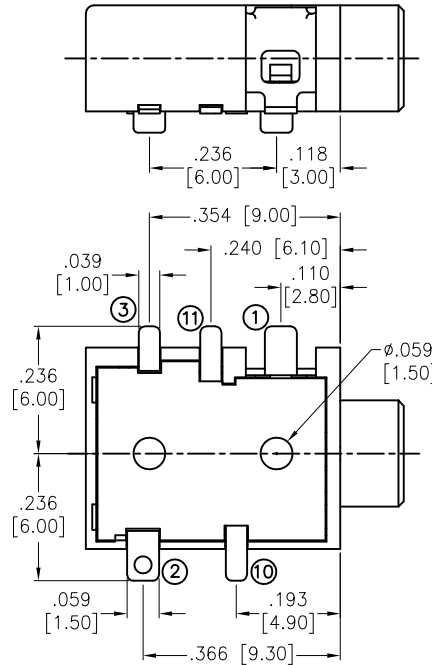


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/16	
A		UPDATE DRAWING	8/9/16	AY/OC

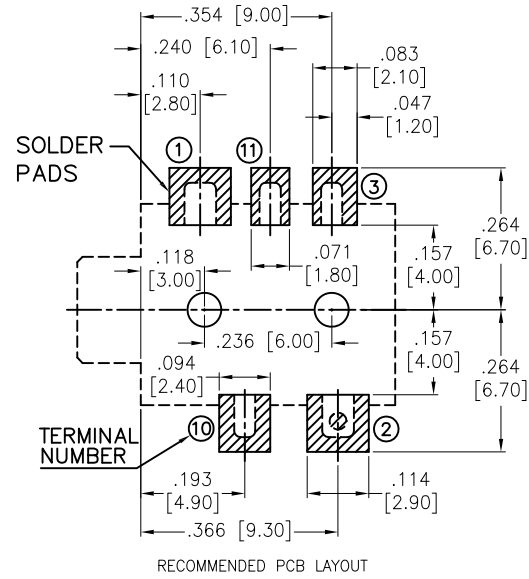

Ø3.5 MATE PLUG

PACKAGED ON TAPE & REEL

SCHEMATIC

ASJ-16T-5-SMT-T/R	ASJ-16T-4A-SMT-T/R	ASJ-16T-4B-SMT-T/R	ASJ-16T-3-SMT-T/R	ASJ-16T-3A-SMT-T/R

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Voltage rating: 12 VDC max
 Current rating: 1 A max
 Contact resistance: 50 mΩ max.
 Insulation resistance: 100 MΩ min. @ 500 VDC
 Dielectric withstanding voltage: 500 Vrms for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS		DATE
DRAWN	AY	8/5/16
CHECKED	OC	8/5/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		
STEREO JACK, 3.5mm, RIGHT ANGLE SURFACE MOUNT		
SIZE	PART NO.	REV.
X	ASJ-16T-X-SMT-T/R	A
REF:	S00021C	SCALE: NTS SHEET 1 OF 1