Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/15	

APPROVED: _____

DATE: _____ TITLE: _____

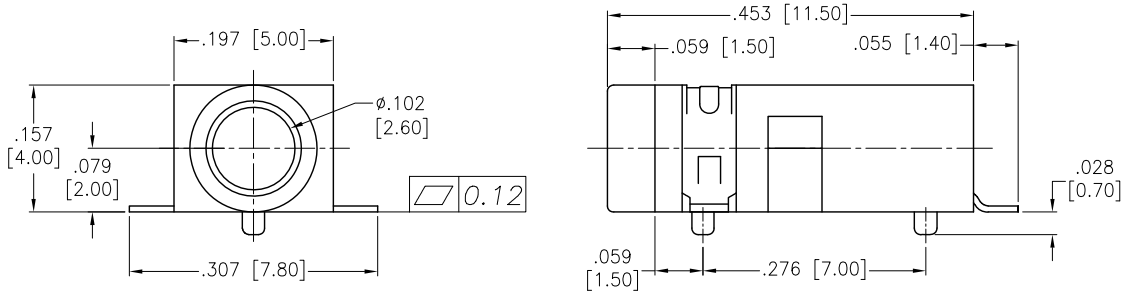

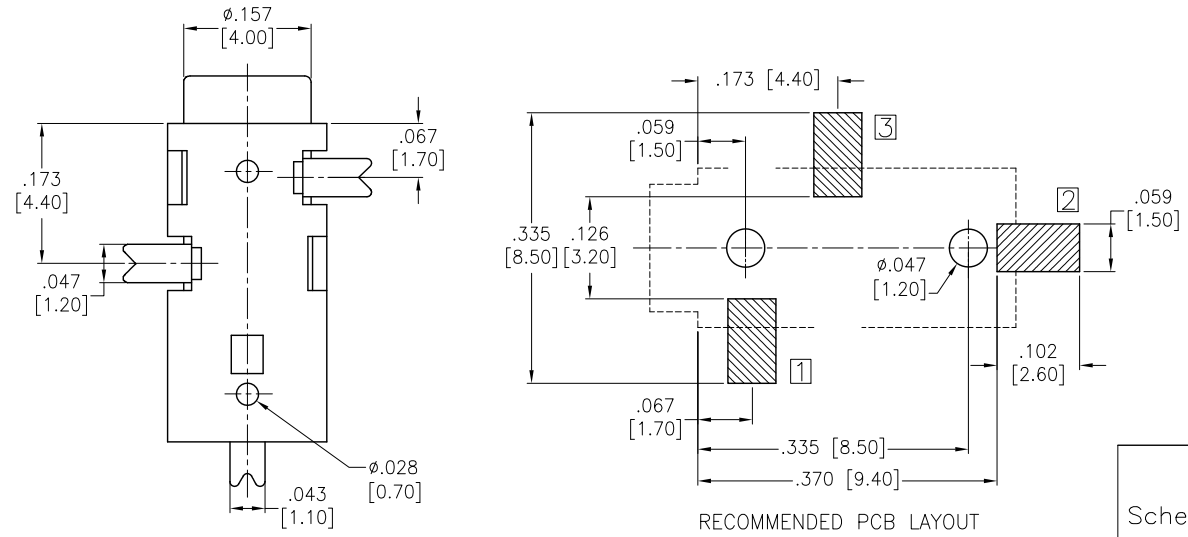

RECOMMENDED PCB LAYOUT

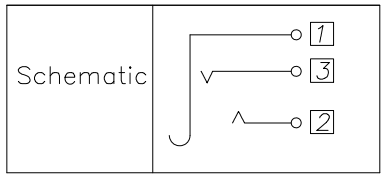

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor bronze
Plating:
Silver over Nickel underplate overall
Electrical:
Operating voltage: 30 VDC max.
Current rating: 0.5 Amp max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/18/15
CHECKED	LW	9/18/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.5MM STEREO JACK

SIZE	PART NO.	REV.
X	ASJ-18-3-T/R	-

REF: S00002C | SCALE: NTS | SHEET 1 OF 1