

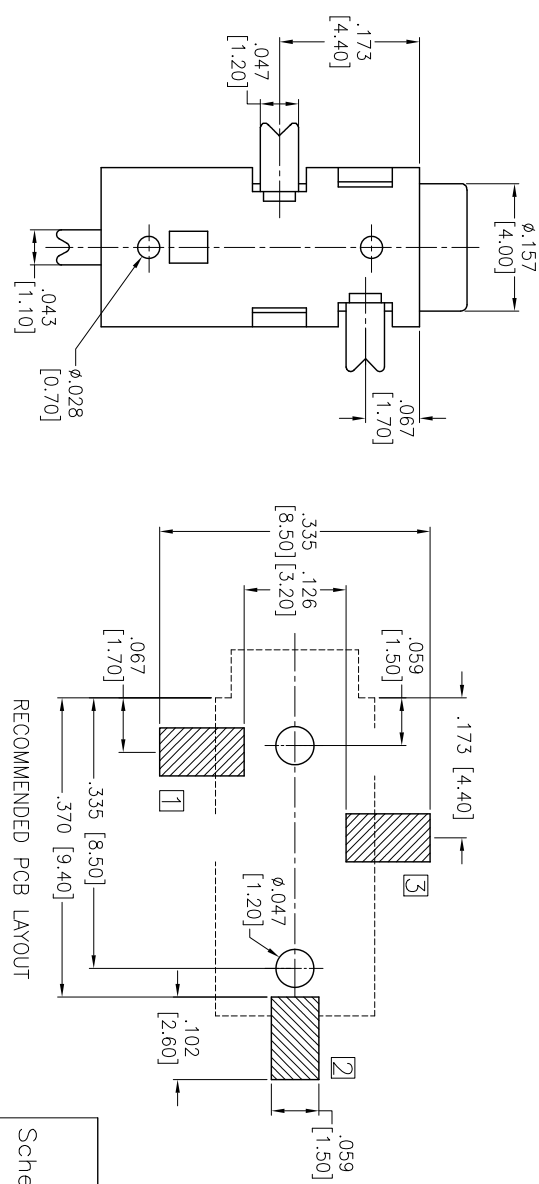


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/13	

APPROVED: _____
 DATE: _____ TITLE: _____

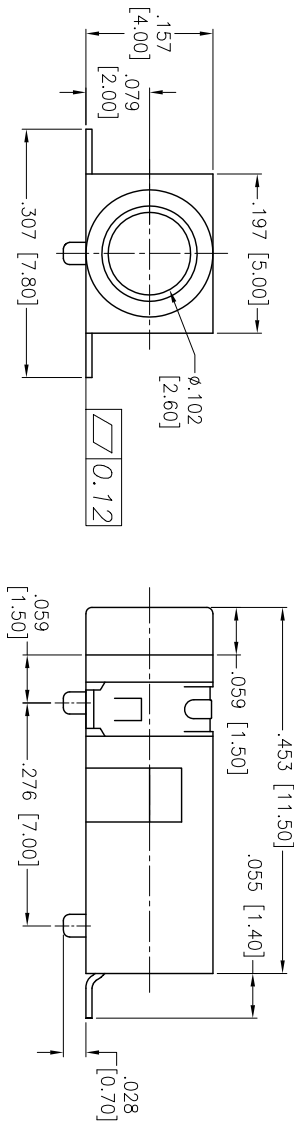

RECOMMENDED PCB LAYOUT

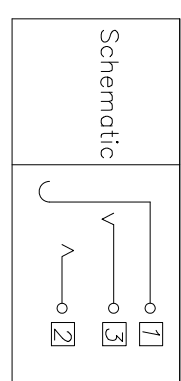

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor bronze
 Plating: Silver over Nickel underplate overall
 Electrical: Operating voltage: 30 VDC max.
 Current rating: 0.5 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Environmental: Lead free, RoHS Compliant

ADAM TECH
 909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X .10 Ø.X
 .XX ±.020 Ø.XXX
 .XXX ±.015 Ø.XXX
 .XXX ±.015

APPROVALS	DATE
DRAWN AY	11/7/13
CHECKED AL	11/7/13
APPROVED	

SIZE	PART NO.	REV.
X	ASJ-18-3	-
REF: S0002C	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1