


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

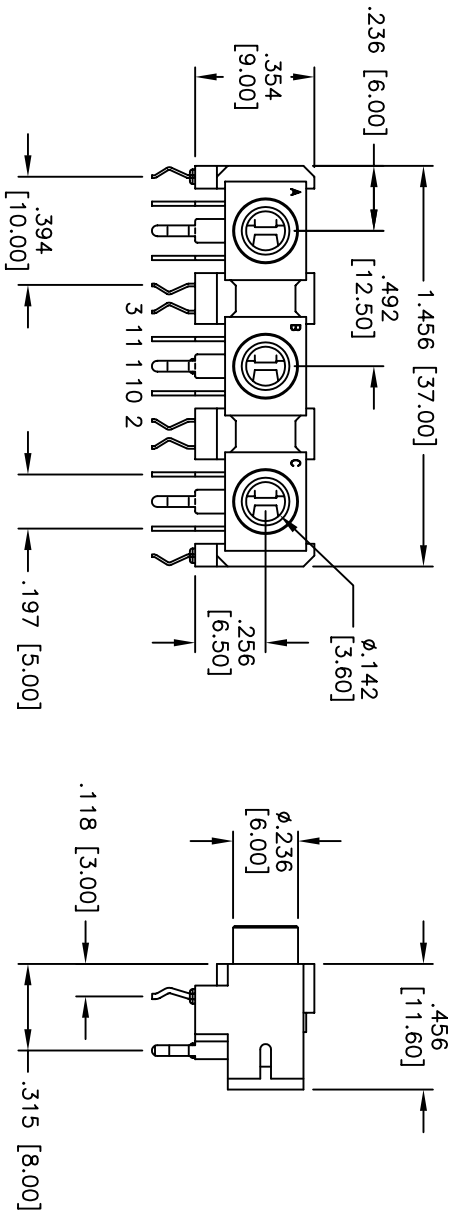

CONTACT FORM	ASJ-40-02	ASJ-40-03	ASJ-40-3A	ASJ-40-4A	ASJ-40-4B	ASJ-40-05
SCHEMATIC						

**SPECIFICATIONS:**

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Bushing: Brass, Nickel plated  
 Contacts: Copper Alloy  
 Plating: Tin over Copper underplate

Electrical: Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -65°C to +125°C

Environmental: Lead free, RoHS compliant.  
 Recommended soldering temp: 230 for 5 sec.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

STEREO JACK, MULTI PORT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS	DATE	TITLE	
DRAWN	SS	10/4/04	
CHECKED		SIZE	
APPROVED		X	
PART NO.		ASJ-40-XX	
SCALE:		NTS	
SHEET		1 OF 1	