
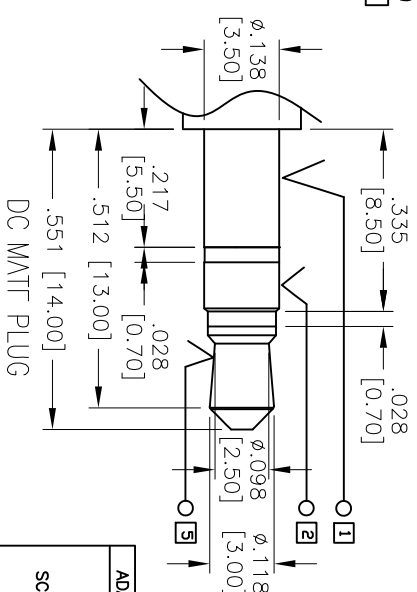



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	
A		REDRAWN	7/23/12	

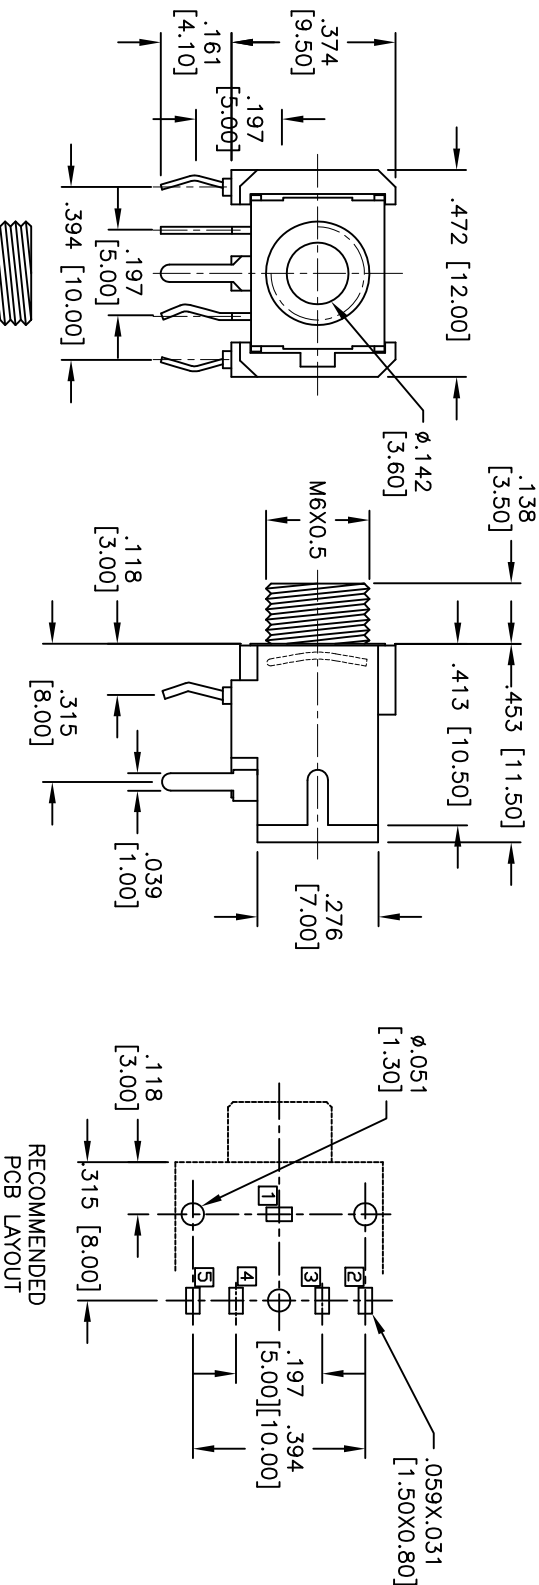

ADAM P/N	ASU-7-05-M	ASU-7-4B-M	ASU-7-3A-M	ASU-7-03-M
SCHEMATIC				

SPECIFICATIONS:

- Material: Insulator: PA66, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Cover: , PBT, Color: Black
- Bushing: Copper alloy, Nickel plated
- Contacts: Copper alloy
- Spring: spring wire, Nickel plated
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 30 VDC max. Current rating: 0.5 Amp max. Contact resistance: 30 mohms max. initial Insulation resistance: 100 Mohms min. Dielectric withstanding voltage: 500 VAC for 1 minute Temperature Rating: Operating temperature: -20°C to +70°C Environmental: Lead Free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

STEREO JACK
 M6 x 0.5 THREADED BUSHING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	SIZE	PART NO.
DRAWN	SS	X	ASU-7-XX-M
CHECKED		REF:	S0002C
APPROVED		SCALE:	NIS
		SHEET	1 OF 1