

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	08/22/13	
A		REDRAWN	6/10/14	HR/AL

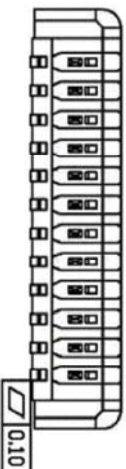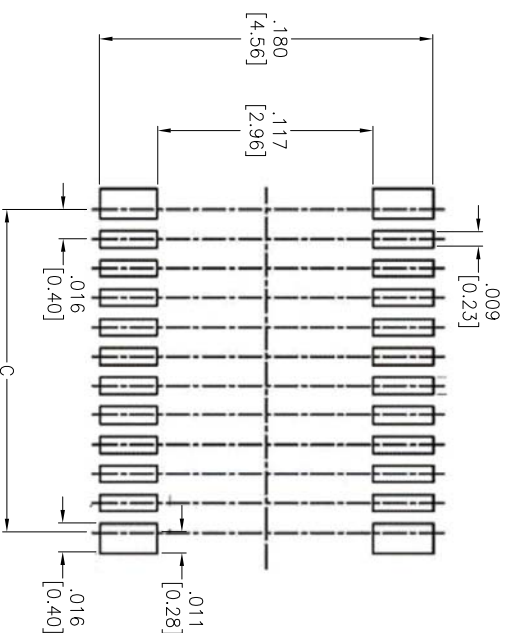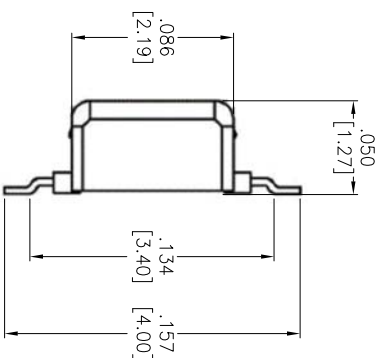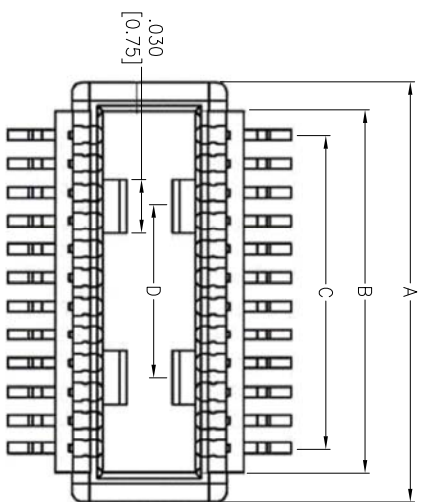

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold over Nickel underplate overall
 Electrical:
 Current rating: 0.4 Amps.
 Contact resistance: 70 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant

PACKAGED ON TAPE & REEL
 Positions: 20, 24, 30, 60, 70
 A = .016 [0.40] x No. of Positions per Row + .043 [1.10]
 B = .016 [0.40] x No. of Positions per Row + .012 [0.30]
 C = .016 [0.40] x No. of Positions per Row - .016 [0.40]
 D = .016 [0.40] x No. of Positions per Row - .094 [2.40]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .016 [0.40] BOARD TO BOARD SOCKET

SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		Holes		DATE	
.X	± .10	ØX	± .10	ØXXX	± .015	XXX	± .010
.XX	± .020	ØXXX	± .015	ØXXX	± .010		
.XXX	± .015	ØXXX	± .010				
DRAWN		TW		DATE		DATE	
CHECKED		AL		DATE		DATE	
APPROVED				DATE		DATE	



A

B

C

D

6

5

4

3

2

1