
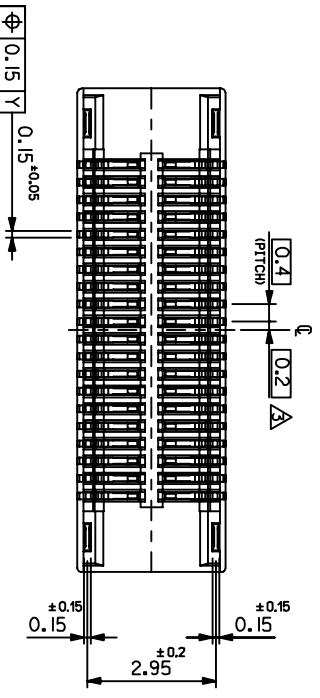
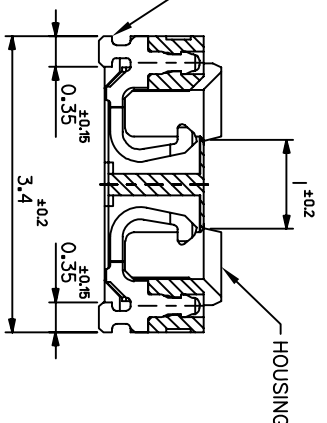

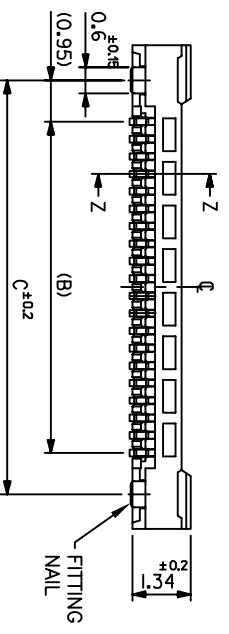


Rev	AWO #	Description	Date	Appr
1	6984	PRELIMINARY RELEASE	8/17/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

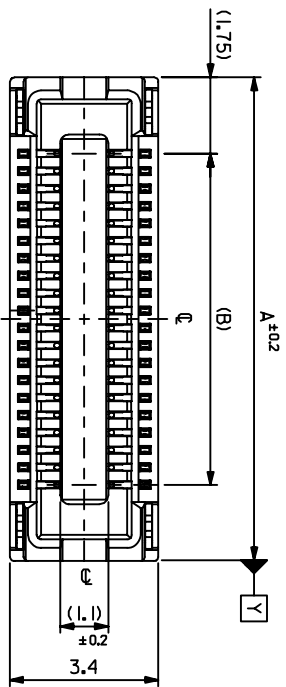

PRELIMINARY

9.5	7.6	11.1	0989851N01	40
11.5	9.6	13.1	0989851N02	50
5.5	3.6	7.1	0989851N03	20
13.5	11.6	15.1	0989851N04	60
7.5	5.6	9.1	0989851N05	30
5.9	4.0	7.5	0989851N06	22
6.3	4.4	7.9	0989851N07	24
C	B	A	MOTOROLA P/N:	CKT.

SPECIFICATIONS:

Material: Insulator: LCP, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Plating:

Gold ovr Nickel underplate overall

Electrical:

Operating voltage: 50V AC/DC max.

Current rating: 0.3 Amps max.

Contact resistance: 40 Mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLE SIZES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DRAWN SS 8/17/06

CHECKED

APPROVED

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .015 [0.40] BOARD TO BOARD SOCKET SURFACE MOUNT

SIZE	PART NO.	REV.
X	BB4-S-XX-1-M	1

REF: SCALE: NTS SHEET 1 OF 1