
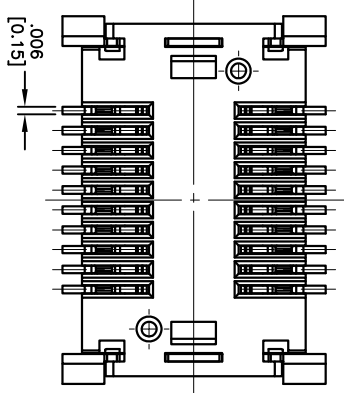
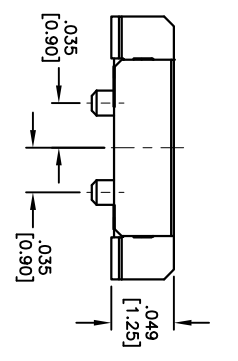
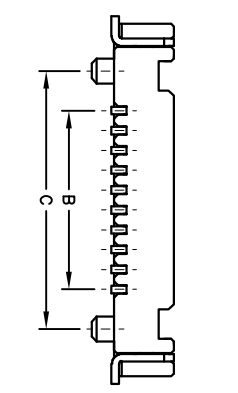
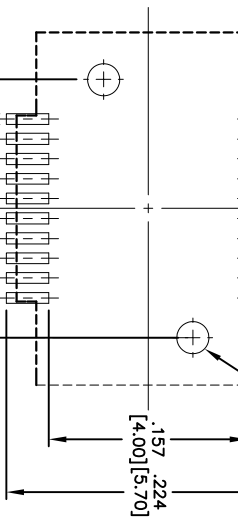

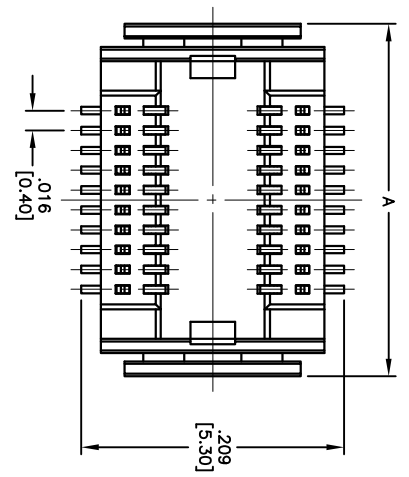


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/02/10	
A		REDRAWN	7/11/12	

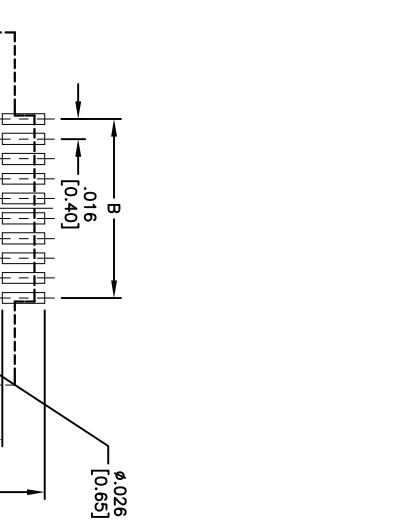

PACKAGED ON TAPE & REEL
 Positions: 10 thru 50
 A = .016 [0.40] x (No. of Contacts per row - 1) + .138 [3.50]
 B = .016 [0.40] x (No. of Contacts per row - 1)
 C = .016 [0.40] x (No. of Contacts per row - 1) + .083 [1.60]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .016 [0.40] BOARD TO BOARD SOCKET, SMT TYPE
 1.25 MM HEIGHT, STACKING HEIGHT=1.5MM

SIZE	PART NO.	REV
X	BB4-SE-XX-G-1.25-T/R	A
REF: S0028T	SCALE: NTS	SHEET 1 OF 1

SPECIFICATIONS:

- Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
- Insulator color: Natural
- Contacts: Copper Alloy
- Hold down: Copper Alloy
- Plating: Gold flash over Nickel underplate overall.
- Electrical: Voltage rating: 50 VAC/DC
- Current rating: 0.5A AC/DC
- Dielectric withstanding voltage: 250 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +70°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	