


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/15	
A		UPDATE DRAWING	3/10/16	AY/WY

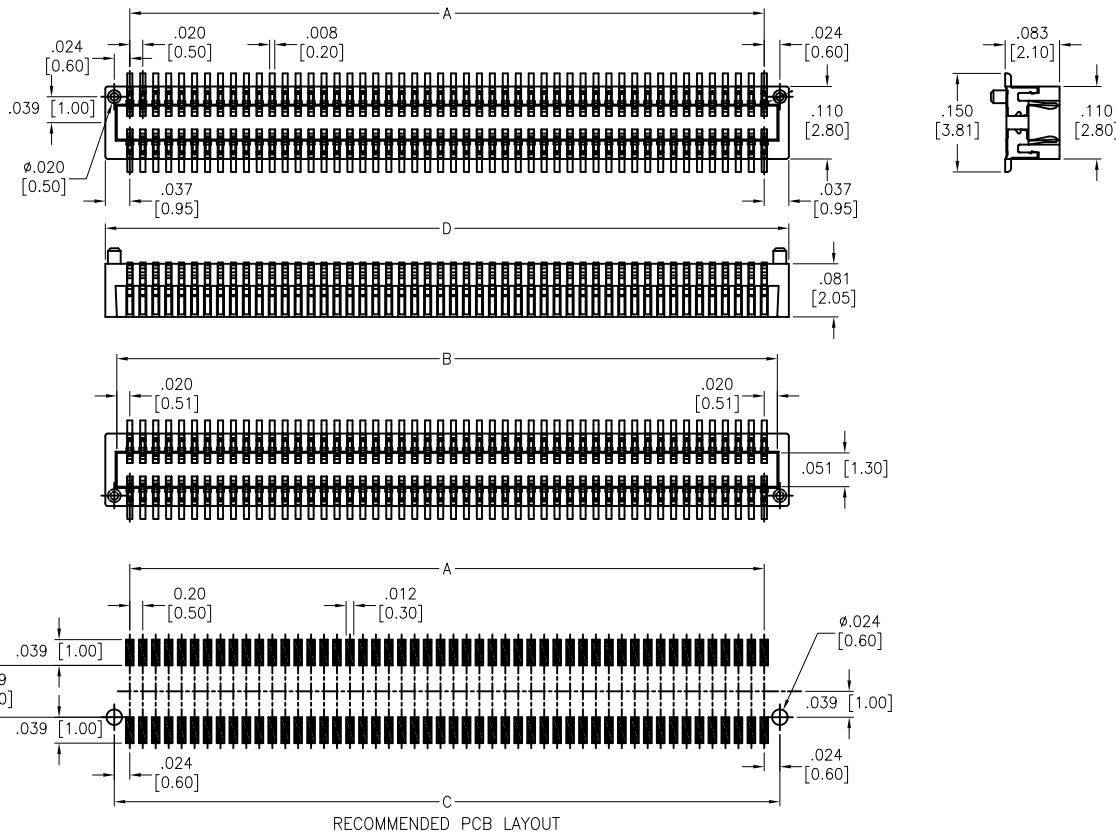

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Operating voltage: 50 V max
 Current rating: 0.5 Amps.
 Contact resistance: 40 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant

A = .020 [0.50] x No. of Spaces
 B = .020 [0.50] x No. of Spaces + .040 [1.02]
 C = .020 [0.50] x No. of Spaces + .047 [1.20]
 D = .020 [0.50] x No. of Spaces + .075 [1.90]

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	∅X ± .10	TITLE .020 [0.50] BOARD TO BOARD PLUG SURFACE MOUNT, HALOGEN FREE	
.XX ± .020	∅XX ± .015		
.XXX ± .015	∅XXX ± .010		
APPROVALS		DATE	
DRAWN	HR	5/18/15	
CHECKED	YC	5/18/15	
APPROVED			
SIZE X	PART NO. BB5-PLA-XXX-G-2.10-HF-T/R	REV. A	
REF: S00070T	SCALE: NTS	SHEET 1 OF 1	

