


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/15/15	
A		UPDATE DRAWING	3/10/16	AY/WY

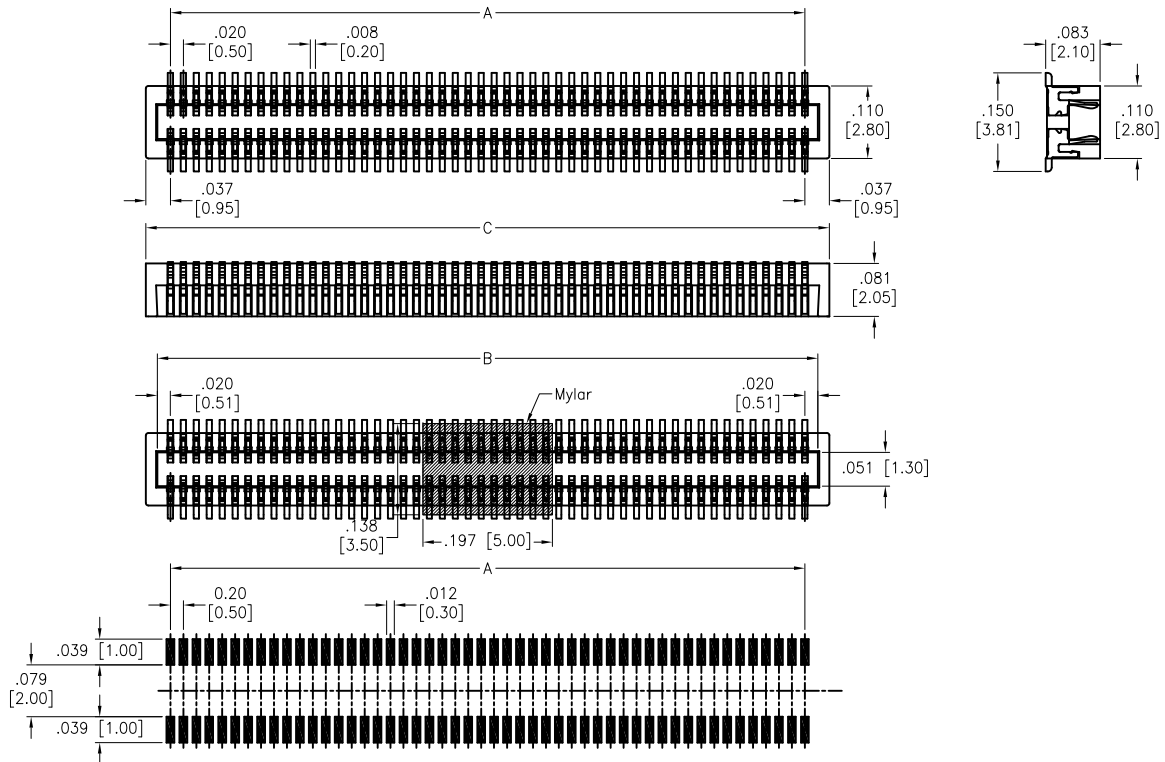

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Operating voltage: 50 V max
 Current rating: 0.5 Amps.
 Contact resistance: 40 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant

Positions: 014 thru 080
 A = .020 [0.50] x No. of Spaces
 B = .020 [0.50] x No. of Spaces + .040 [1.02]
 C = .020 [0.50] x No. of Spaces + .075 [1.90]

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			
APPROVALS		DATE	
DRAWN	AY	10/15/15	
CHECKED	GC	10/15/15	
APPROVED			
TITLE .020 [0.50] BOARD TO BOARD PLUG SURFACE MOUNT, NO PEG, HALOGEN FREE			
SIZE X	PART NO. BB5-PLA-XXX-G-2.10-NP-HF-KT-T/R	REV. A	
REF: S00070T	SCALE: NTS	SHEET 1 OF 1	

