
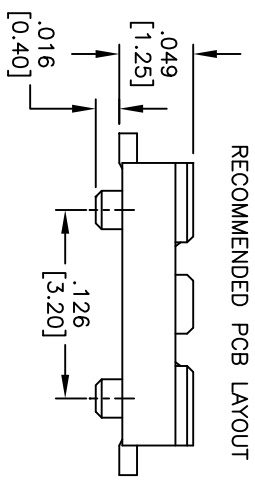
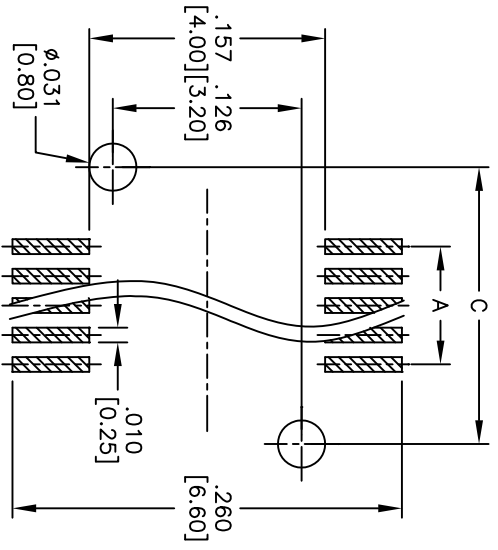
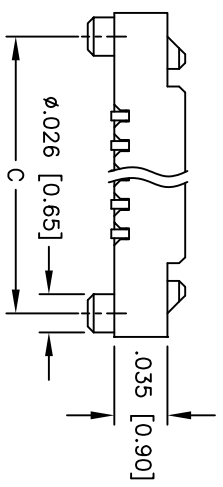


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/07/10	

APPROVED: _____

DATE: _____ TITLE: _____

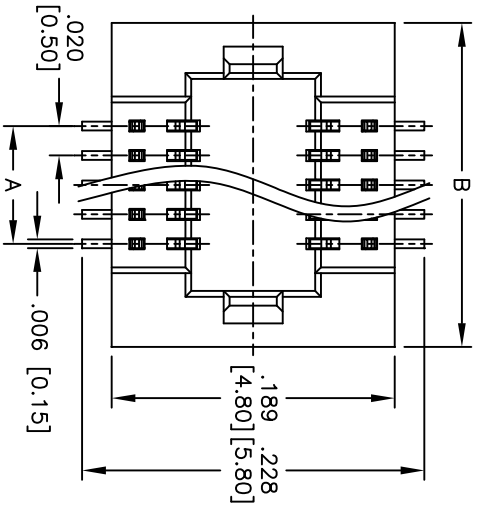

PACKAGED ON TAPE & REEL

Positions: 10 thru 60

A = .020 [0.50] x (No. of Contacts per row - 1)
 B = .020 [0.50] x (No. of Contacts per row - 1) + .138 [3.50]
 C = .020 [0.50] x (No. of Contacts per row - 1) + .106 [2.70]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .020 [0.50] BOARD TO BOARD SOCKET, SMT TYPE
 1.25MM HEIGHT, STACKING HEIGHT=1.5MM

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Hold down: Copper Alloy
 Plating: Gold flash over Nickel underplate overall.
 Electrical: Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 40 mohms max. initial
 Insulation resistance: 500 Mohms min
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		Holes	
.X ± .10	ØXX ± .10		
.XX ± .020	ØXXX ± .015		
.XXX ± .015	ØXXXX ± .010		
APPROVALS		DATE	
DRAWN	DY	12/07/10	
CHECKED			
APPROVED			
SIZE	PART NO.	TITLE	
X	BB5-SE-XX-G-1.25-T/R	.020 [0.50] BOARD TO BOARD SOCKET, SMT TYPE 1.25MM HEIGHT, STACKING HEIGHT=1.5MM	
REF: S0028T	SCALE: NTS	SHEET 1 OF 1	