
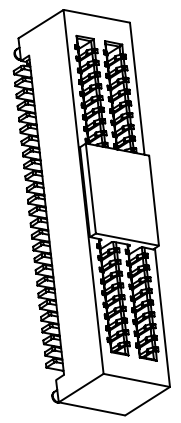
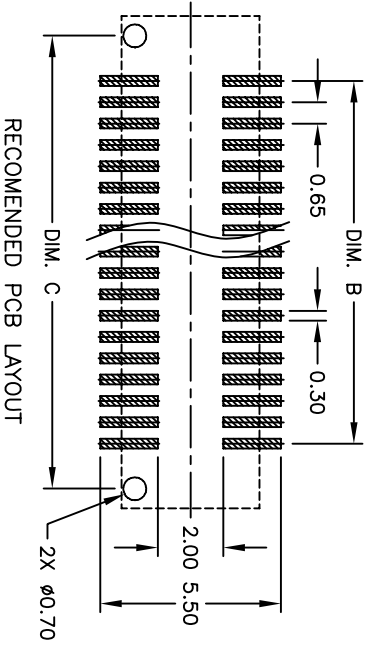
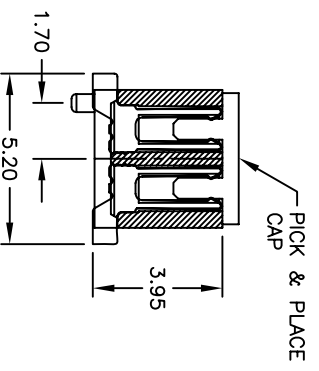
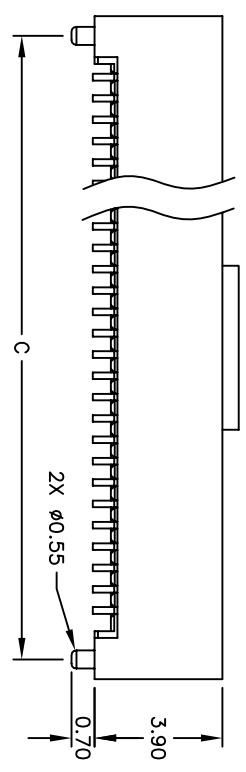
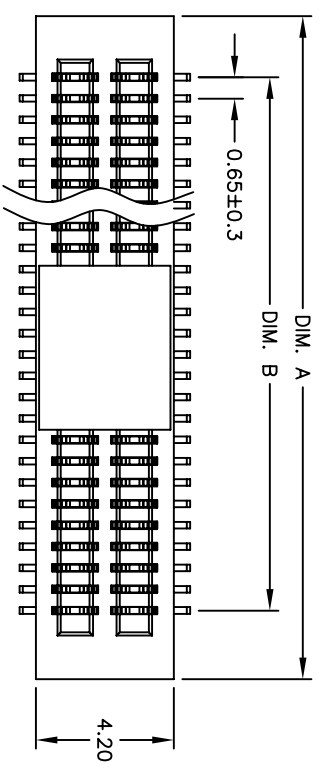


Rev	AWO #	Description	Date	Appr
-	6984	RELEASED	8/17/06	

APPROVED: _____
 DATE: _____ TITLE: _____



****Contact Dimension**

Contact	DIM. A	DIM. B	DIM. C
10	6.55	2.60	5.35
20	9.80	5.85	8.60
30	13.05	9.10	11.85
40	16.30	12.35	15.10
50	19.55	15.60	18.35
52	20.20	16.25	19.00

SPECIFICATIONS:
 Material: Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Gold ovr Nickel underplate overall

Electrical:
 Operating voltage: 60V AC/DC max.
 Current rating: 0.5 Amps max.
 Contact resistance: 80 Mohms max. initial
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 150 VAC for 1 minute

Temperature Rating:
 Operating temperature: -55°C to +85°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

X	± .10	ØX	± .015
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS: _____ DATE: _____

DRAWN: SS 8/17/06
 CHECKED: _____
 APPROVED: _____

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .025 [0.65] BOARD TO BOARD SOCKET SURFACE MOUNT

SIZE	PART NO.	REV.
X	BB65-S-XXX-G	
REF:	SCALE: NTS	SHEET 1 OF 1