

6

5

4

3

2


1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

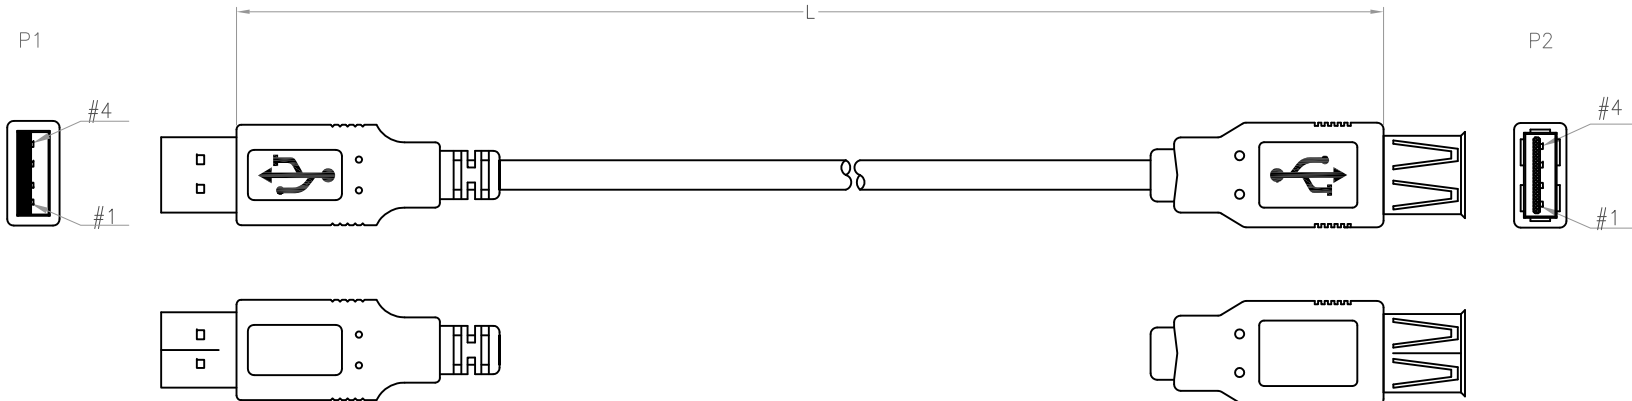

PIN ASSIGNMENT			
P1		P2	
1	RED	1	RED
2	WHITE	2	WHITE
3	GREEN	3	GREEN
4	BLACK	4	BLACK
SHELL	BRAID	SHELL	BRAID

ADAM P/N	L
CA-USB-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB-AM/AF-10FT	120.079"±1.969" [3050±50mm]

SPECIFICATIONS:

Connector:
P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC
P2= USB Connector 2.0 A Type Socket, Insulator Color: White, Overmold Color: Black, 50P PVC
Cable:
UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24),Jacket Color: Black .

Electrical Test:
All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES HOLES		
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	HR	10/13/15
CHECKED	TW	10/13/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A TO USB 2.0 SOCKET TYPE A

SIZE X	PART NO. CA-USB-AM/AF-XFT	REV. -
REF: S00087T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1