
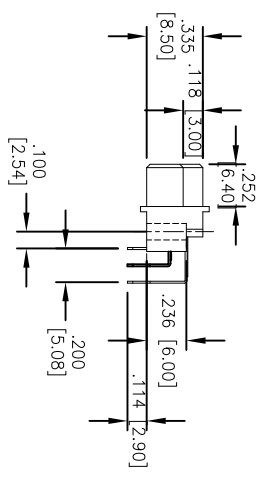
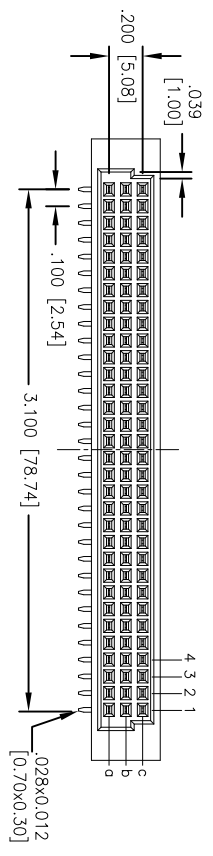
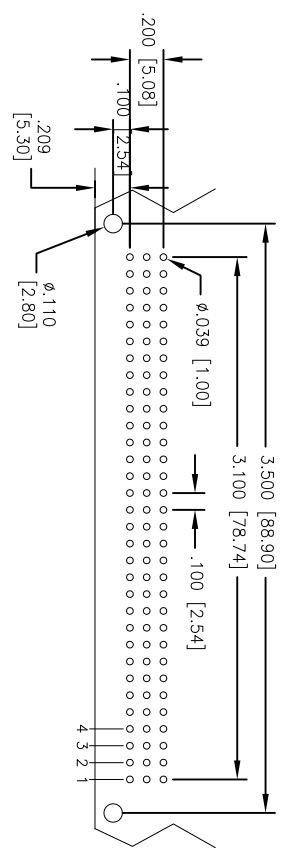


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 5/18/06 | |
| A | | REDRAWN | 9/5/12 | |

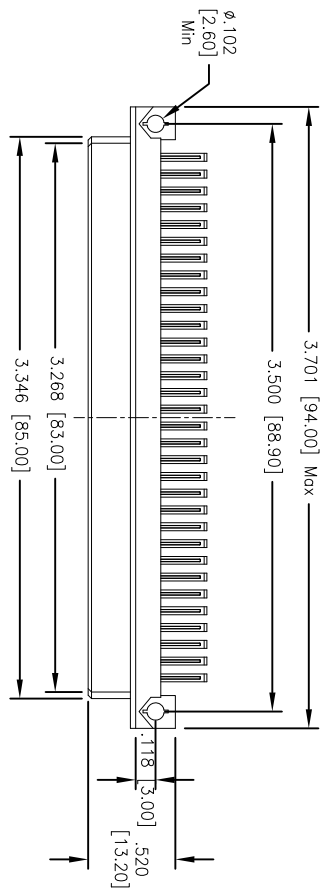

| "X" | PLATING |
|-----|------------|
| 1 | 30 u" Gold |
| 2 | 15 u" Gold |
| 3 | Gold Flash |

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Beige
 Contacts: Phosphor Bronze
 Lock: Phosphor Bronze
 Plating: X Gold over Nickel on contact area, Tin over Copper underplate on tails
 (See chart for thickness)
 Electrical:
 Current rating: 2 Amps max
 Contact resistance: 50 mohms max @ 500 VDC
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 96P FEMALE TYPE R, RIGHT ANGLE PCB, CLASS 3 PLATING

| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES | | HOLES | | DATE | |
|--|------------|---------------|--------|------|--|
| X | ± .10 | ØX | ± .10 | | |
| .XX | ± .020 | ØXX | ± .015 | | |
| .XXX | ± .015 | ØXXX | ± .010 | | |
| APPROVALS | | DATE | | | |
| DRAWN | SS | 5/18/06 | | | |
| CHECKED | | | | | |
| APPROVED | | | | | |
| REF: S0008T | SCALE: NTS | SHEET: 1 OF 1 | REV: A | | |