
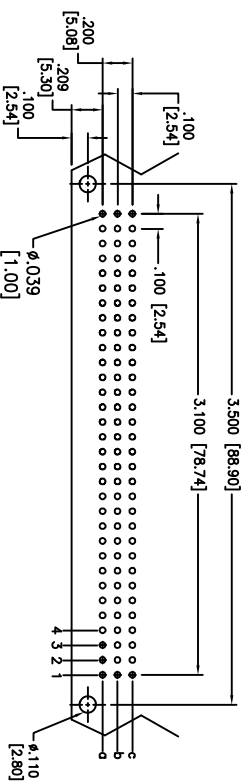
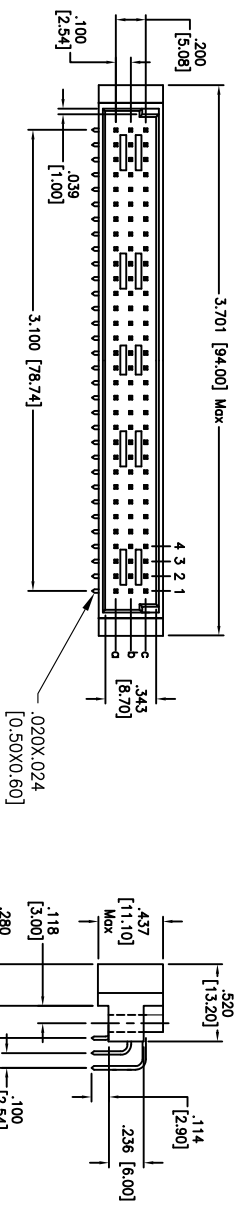


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/04	
A		REVISED DIM.	4/11/11	
B		REDRAWN	7/16/12	

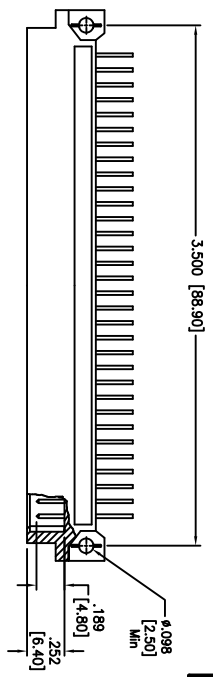

**RECOMMENDED PCB LAYOUT**

"X" PLATING	CLASS
1 30 u" Gold	1
2 15 u" Gold	2
3 Gold Flash	3

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic Polyester, glass filled, rated UL 94V-0  
 Contacts: Copper Alloy  
 Boardlock: Copper Alloy  
**Plating:**  
 X Gold over Nickel underplate on contact area,  
 Tin over Copper underplate on solder tails.  
 (See chart for thickness)

**Electrical:**  
 Current rating: 2 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1000 Mohms min@ DC 500V  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -55°C to +125°C  
 Environmental:  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C MALE, 96 PINS LOADED,  
 3 ROW RIGHT ANGLE, ROWS A & B & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN SS	10/12/04
CHECKED	
APPROVED	
SIZE PART NO.	REV.
X DIN-96MR-L33-A1CX	B
REF: S0006T	SCALE: NTS
	SHEET 1 OF 1