
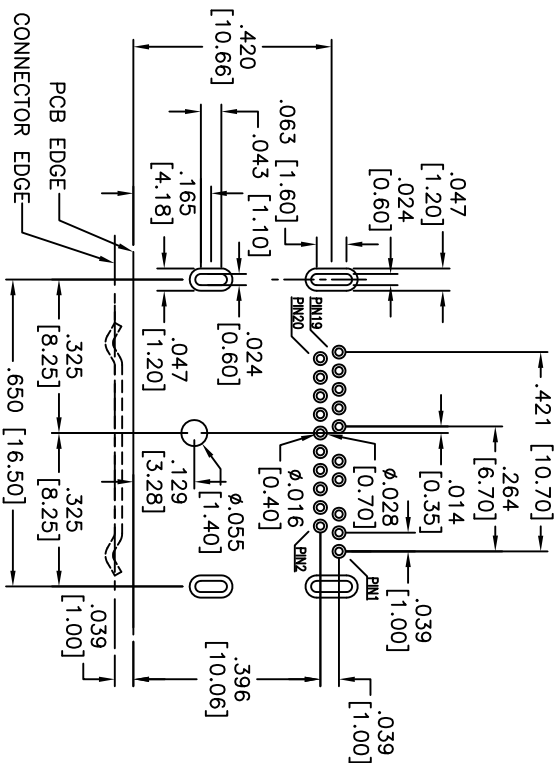




Rev	AWO #	Description	Date	Appr
-		RELEASED	12/19/12	

APPROVED: _____

DATE: _____ TITLE: _____

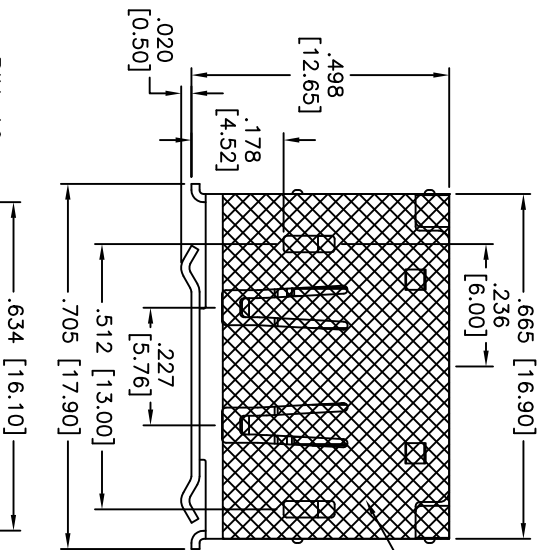

RECOMMENDED PCB LAYOUT

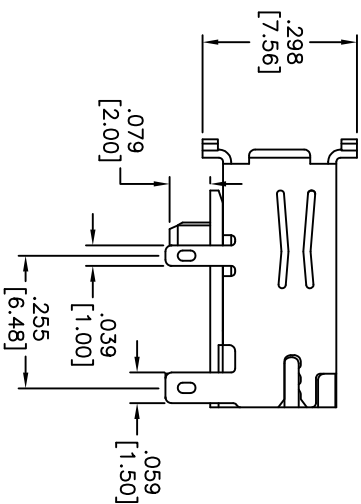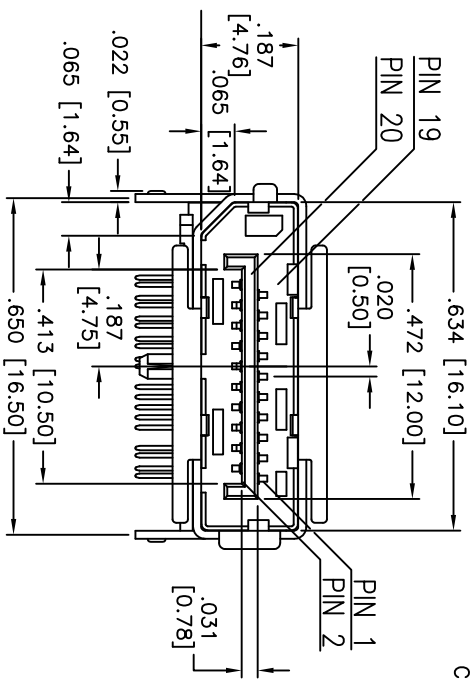

SPECIFICATIONS:

Material: HI-temp thermoplastic, rated UL 94V-0

Housing: HI-temp thermoplastic, rated UL 94V-0

Contact: Copper Alloy

Shell: Brass, nickel plated

Plating:

15u" Gold over Nickel underplate overall

Electrical:

Operating voltage: 40 VAC

Current rating: 0.5 Amps min

Withstanding Voltage: 500V AC for 1 minute

Insulation Resistance: 100M ohms min.

Contact Resistance: 30 ohms max.

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 DISPLAYPORT RECEPTACLE, R/A, DIP TYPE
 20 PIN, 15U" GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		
.X ± .10	ØX	± .10
.XX ± .020	ØXX	± .015
.XXX ± .015	ØXXX	± .010
APPROVALS		
DRAWN	AY	12/19/12
CHECKED	AH	12/19/12
APPROVED		
SIZE	PART NO.	REV.
X	DPC-F-S-RA-P-15-KT	
REF:	SCALE: NTS	SHEET 1 OF 1

A

B

C

D

6

5

4

3

2

1

6

5

4

3

2

1