

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/14	

6

5

4

3


2

1

APPROVED: _____


DATE: _____ TITLE: _____

D

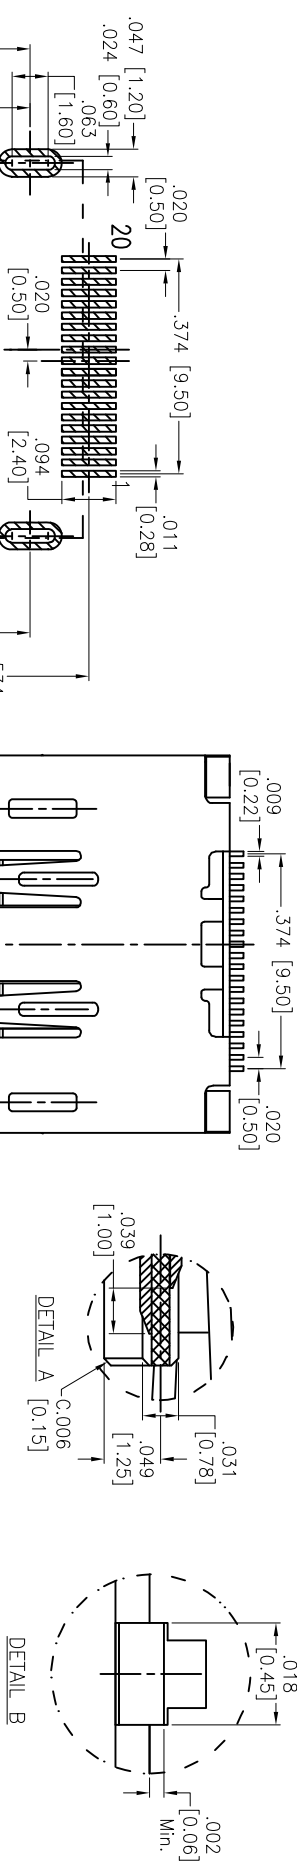


D

C

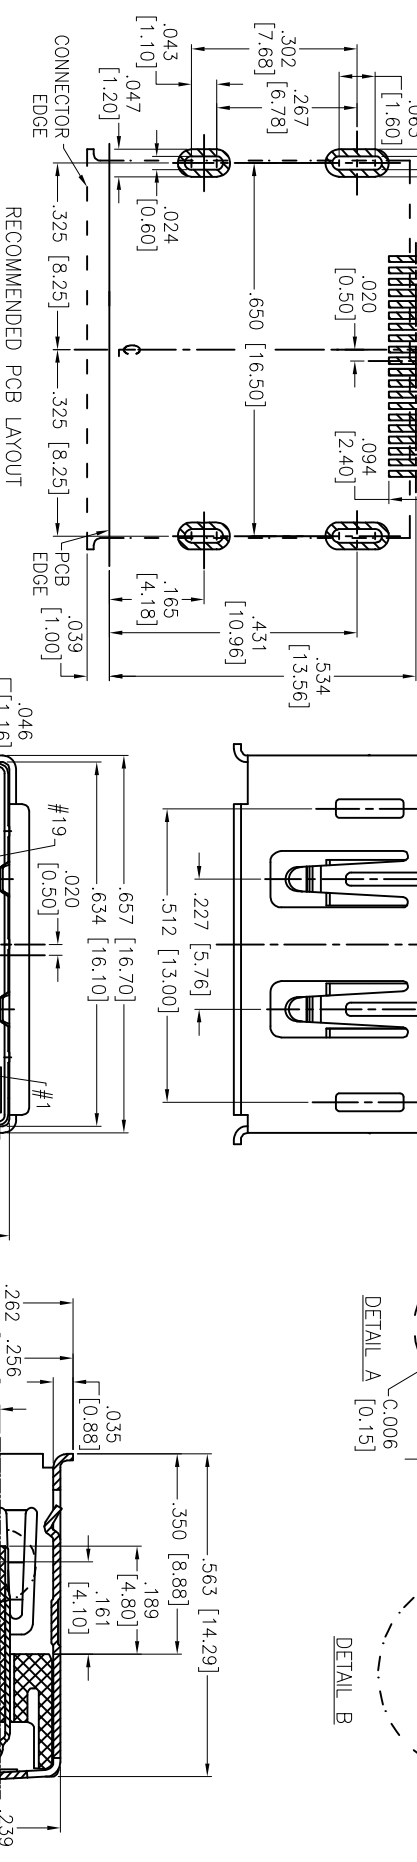

C

B

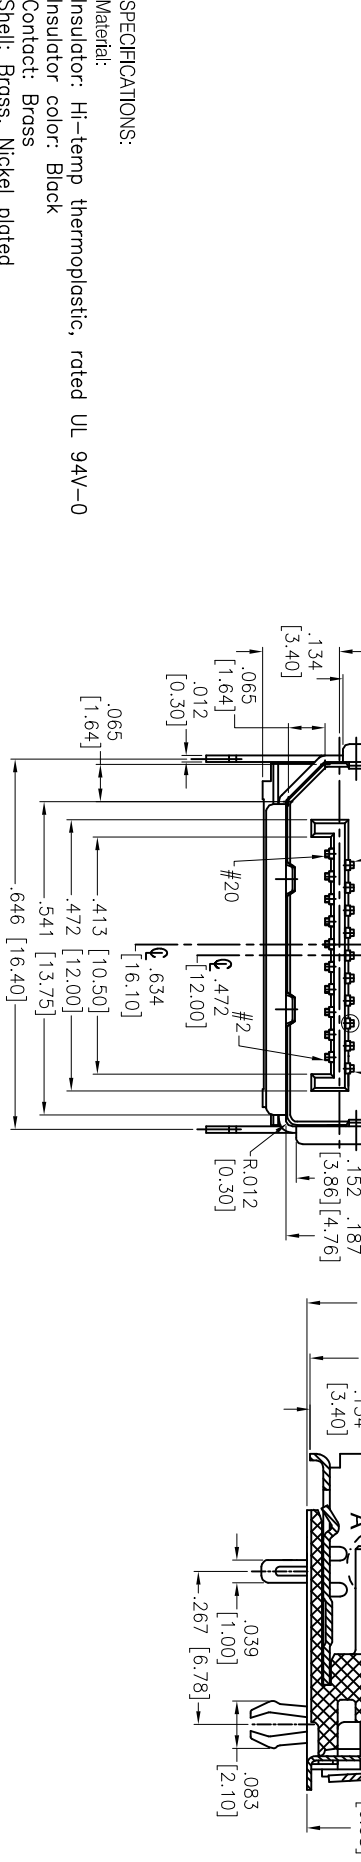

B

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Brass
 Shell: Brass, Nickel plated
 Plating:
 Gold Flash over Nickel on Contact area.
 Tin plating on Solder Tail
 Electrical:
 Operating voltage: 40 VAC
 Current rating: 0.5 Amps min
 Contact Resistance: 30 ohms max.
 Insulation Resistance: 100M ohms min.
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 DISPLAYPORT RECEPTACLE, R/A, SMT TYPE
 20 PINS, W/ BOARDLOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE		DATE	
.X	± .10	ØXX	± .10		± .015		
.XX	± .020	ØXXX	± .015		± .010		
.XXX	± .015	ØXXXX	± .010				
APPROVALS		DATE		DATE		DATE	
DRAWN	AY		8/5/14		8/5/14		
CHECKED	NP		8/5/14		8/5/14		
APPROVED							
TITLE		SIZE	PART NO.	REV.			
DISPLAYPORT RECEPTACLE, R/A, SMT TYPE		X	DPC-F-S-RA-SMT-BL-T/R				
20 PINS, W/ BOARDLOCK		REF:	S00078T	SCALE:	NIS	SHEET	1 OF 1

A

A

6

5

4

3

2

1

