

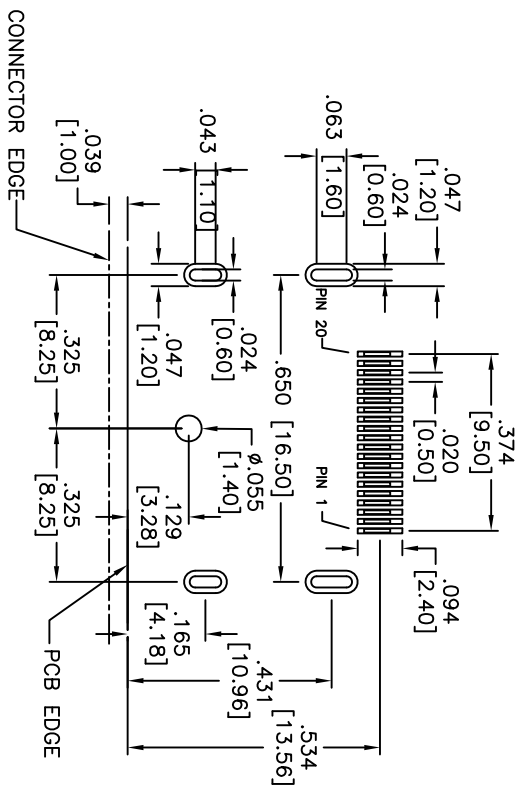
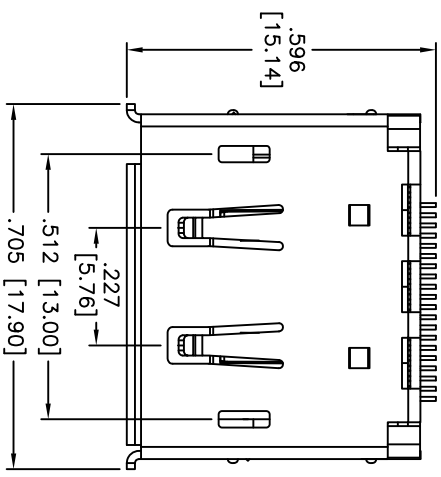


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/06/09	

APPROVED: _____
 DATE: _____ TITLE: _____

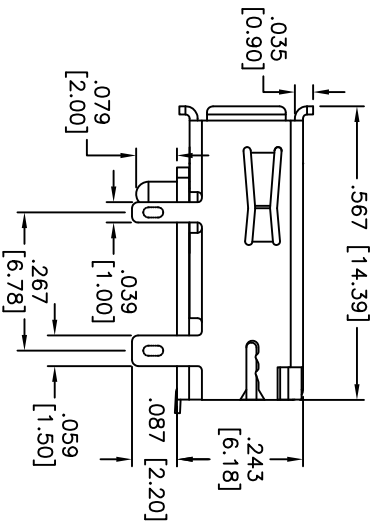

RECOMMENDED PCB LAYOUT

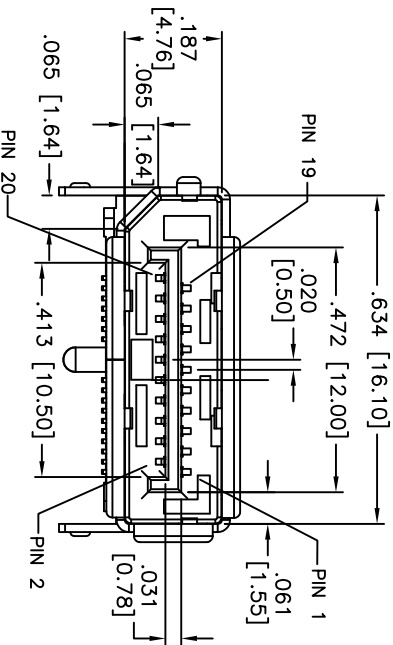

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Contact: Copper Alloy
 Shell: Brass, nickel plated
 Plating: 15u" Gold over Nickel underplate overall
 Electrical: Operating voltage: 40 VAC
 Current rating: 0.5 Amps min
 Withstanding Voltage: 500V AC for 1 minute
 Insulation Resistance: 100M ohms min.
 Contact Resistance: 30 ohms max.
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXX ±.010
 APPROVALS DATE

DRAWN	DY	1/06/09
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE	PART NO.	REV.
X	DPC-F-S-RA-SMT-P-15	-
REF:	SCALE: NTS	SHEET 1 OF 1

TITLE: DISPLAYPORT RECEPTACLE, R/A, SMT TYPE
 20 PIN, 15 U" GOLD PLATED