Rev	AWO #	Description	Date	Appr
-		RELEASED	6/24/14	

APPROVED: _____

DATE: _____ TITLE: _____

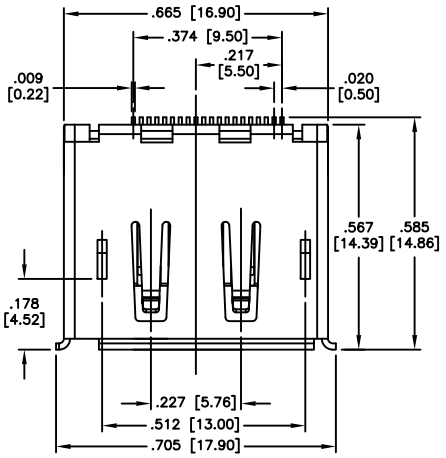

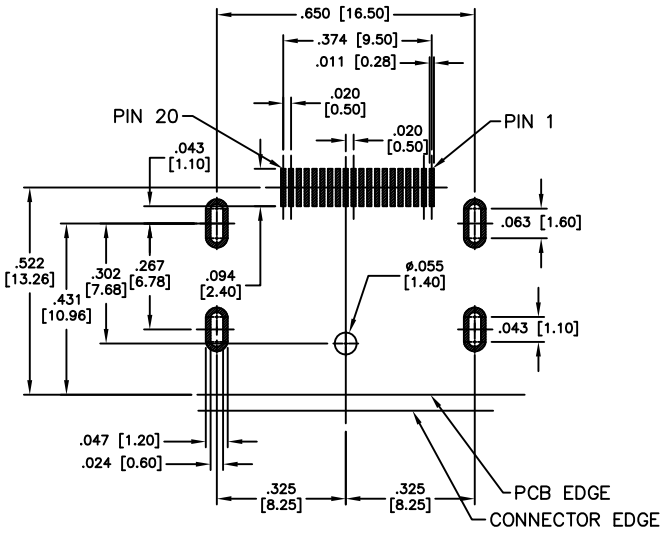

RECCOMMENDER PCB LAYOUT(THICKNESS=1.6±0.15)

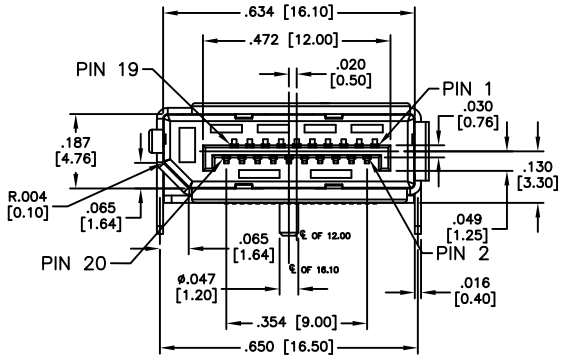

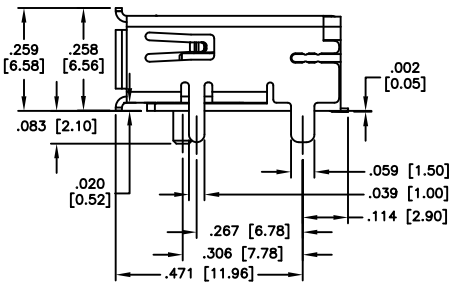

SPECIFICATIONS:
Material:
Insulator: Thermal Plastic, rated UL 94V–0
Insulator color: Black
Contact: Copper Alloy
Shell: Copper Alloy, Nickel plated
Plating:
15u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 40 VAC
Current rating: 0.5 Amps min
Conatct Resistance: 30 mohms max.
Insulation Resistance: 100 Mohms min.
Withstanding Voltage: 500V AC for 1 minute
Temperature Rating:
Operating temperature: −20°C to +85°C
Environmetal:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	6/24/14
CHECKED	LL	6/24/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DISPLAYPORT RECEPTACLE, R/A, SMT TYPE
20 PIN, 15 u" GOLD PLATED, TAPE & REEL

SIZE	PART NO.	REV.
X	DPC-F-S-RA-SMT-P-CS2-15-T/R	-

REF:	SCALE:	SHEET
S00013T	NTS	1 OF 1