
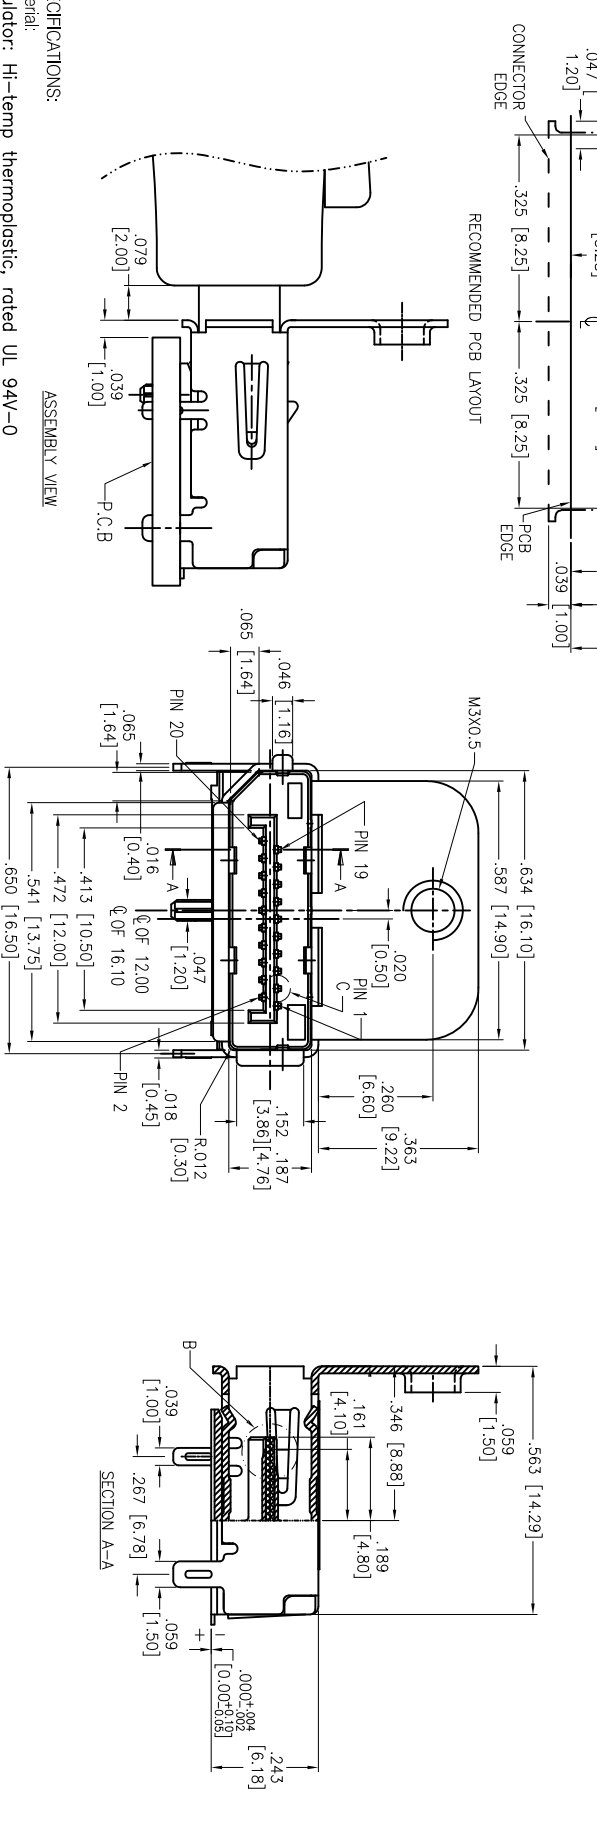


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/9/15	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

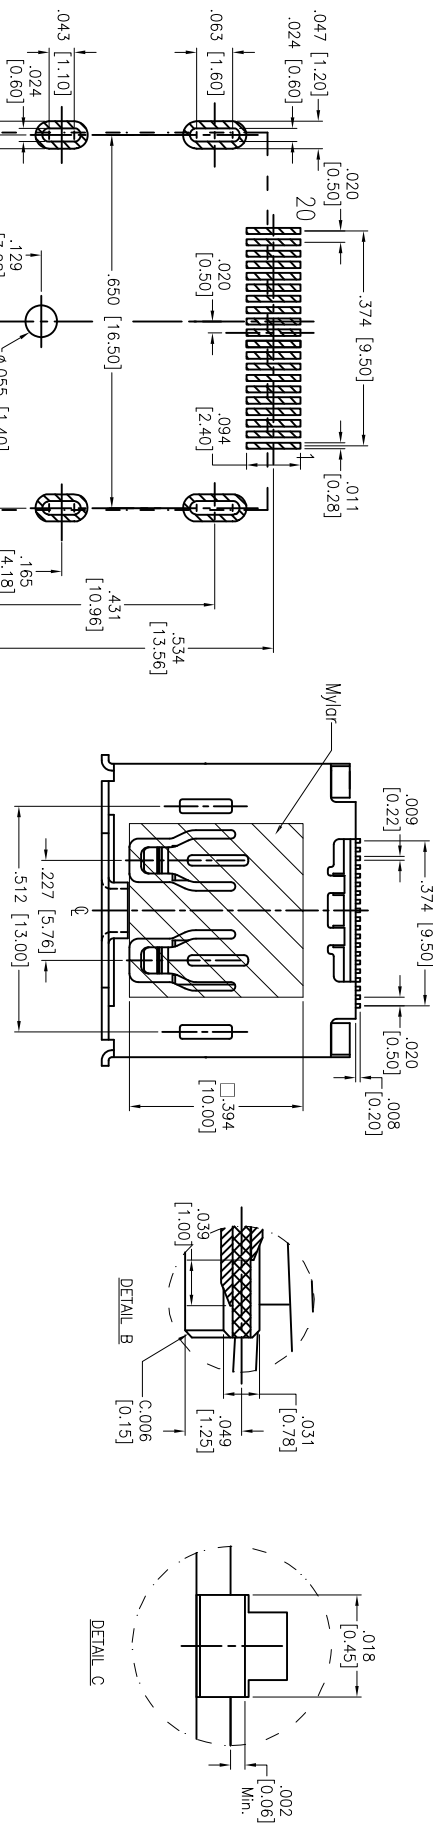

Pin No.	Signal Type	Pin No.	Signal Type
1	In	11	GND
2	GND	12	In
3	In	13	CONF(see note 1)
4	In	14	CONF(see note 1)
5	GND	15	I/O
6	In	16	GND
7	In	17	I/O
8	GND	18	Out
9	In	19	RTN
10	In	20	Power Out(see note 2)

**SPECIFICATIONS:**  
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contact: Brass  
 Shell: Brass, Nickel plated  
 Plating: 30u" Gold over Nickel underplate on contact area, Tin over Nickel underplate on solder tails  
 Electrical:  
 Operating voltage: 40 VAC  
 Current rating: 0.5 Amps min  
 Contact Resistance: 30 mohms max.  
 Insulation Resistance: 100 Mohms min.  
 Withstanding Voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HILES ±.10  
 .XX ±.020  
 .XXX ±.015  
 .XXX ±.010  
 APPROVALS DATE

DRAWN	HR	3/9/15
CHECKED	LL	3/9/15
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	20 PINS, W/ PEG, W/ WIDE MOUNTING FLANG
DISPLAYPORT RECEPTACLE, RA, SMT TYPE	
SIZE	PART NO.
X	DPCF-S-RA-SMT-P-WMF-30-KT-T/R
REF: S00078T	SCALE: NTS
	SHEET 1 OF 1

