
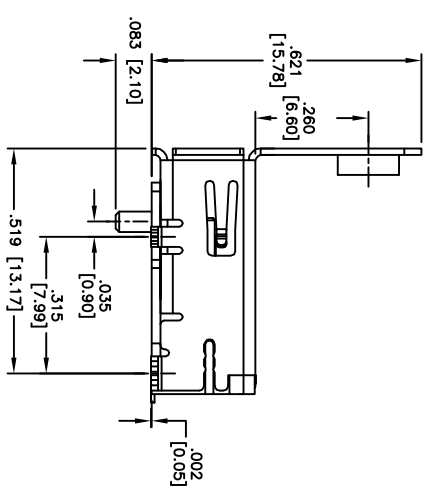
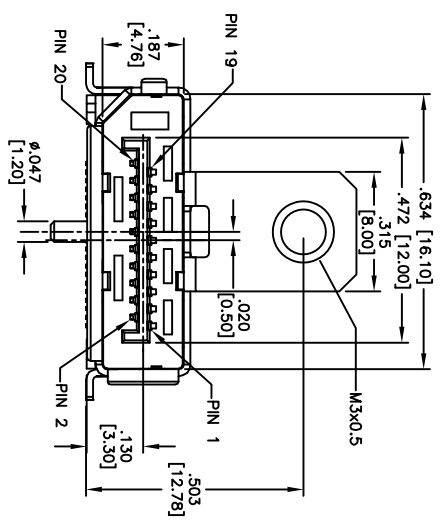


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/17/15	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

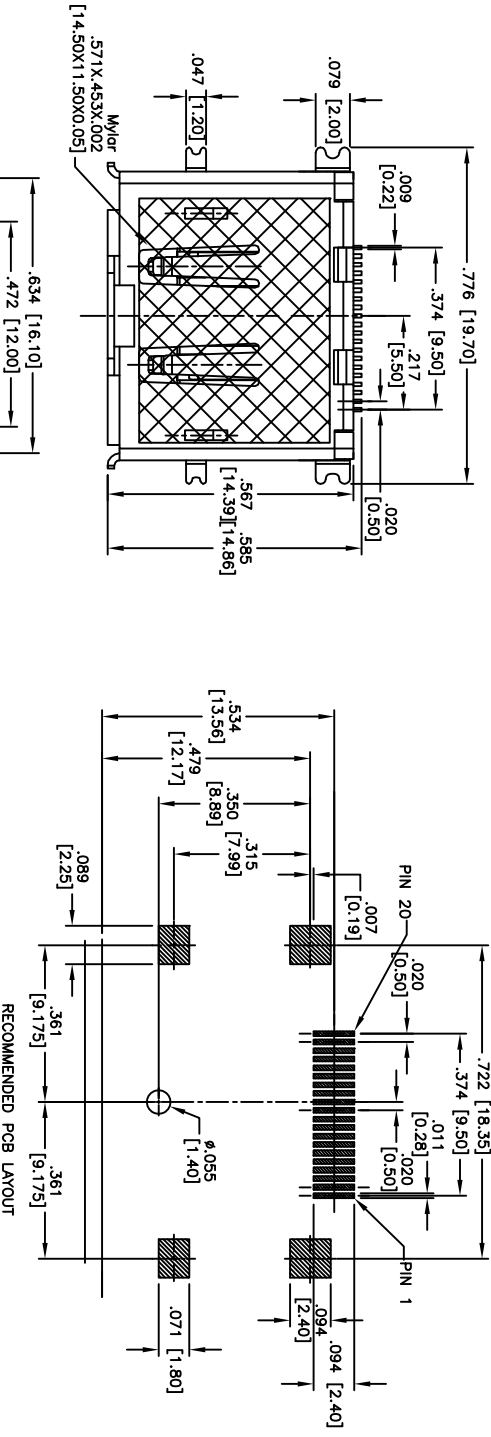

**SPECIFICATIONS:**

- Material: Housing: Hi-temp thermoplastic, rated UL 94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy, nickel plated
- Plating: 15u" Gold over Nickel underplate on contact area
- Electrical: Operating voltage: 40 VAC
- Current rating: 0.5 Amps min
- Conduct Resistance: 50 ohms max.
- Insulation Resistance: 100M ohms min.
- Withstanding Voltage: 500V AC for 1 minute
- Temperature Rating: Operating temperature: -20°C to +85°C
- Environmental: Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DISPLAYPORT RECEPTACLE, R/A, SMT TYPE  
 15u" SEL GOLD PLATED, W/ MOUNTING FLANG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN AY	4/17/15
CHECKED MW	4/17/15
APPROVED	

SIZE	PART NO.	REV.
X	DPC-F-S-RA-TSMT-MF-15-KT-1/R	-
REF: S000131	SCALE: NTS	SHEET 1 OF 1