
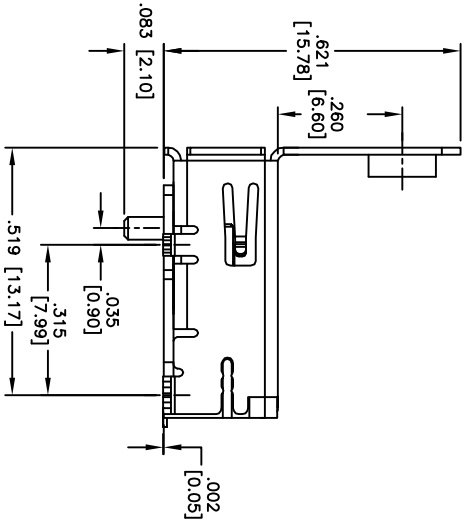
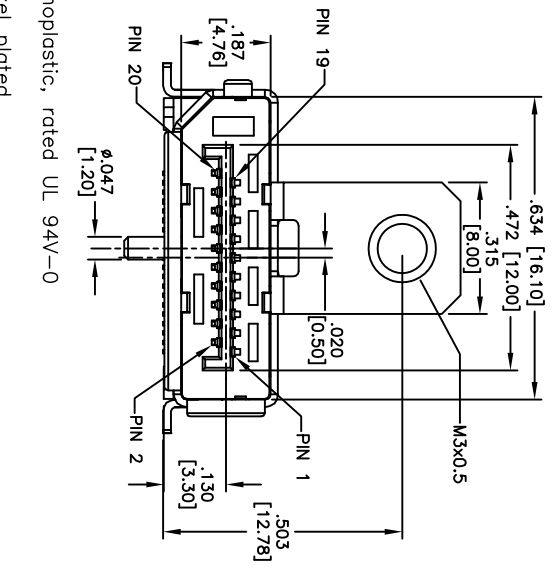
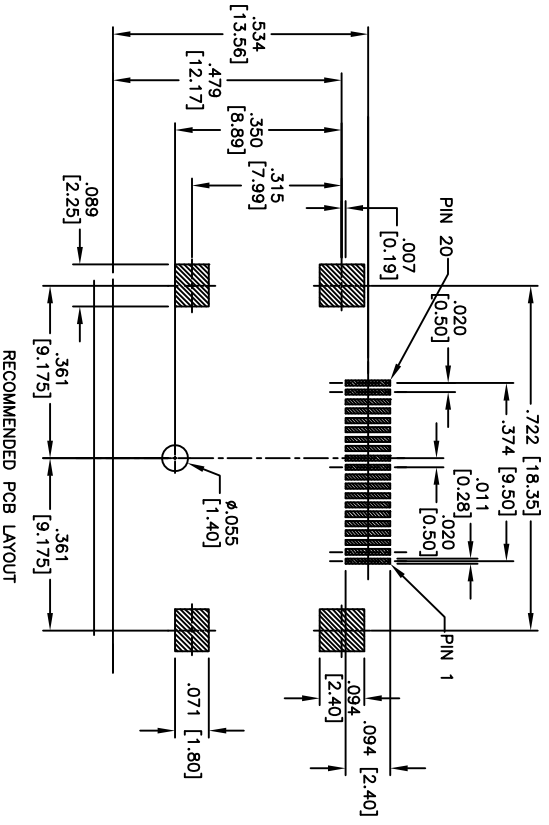


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9840	RELEASED	11/11/09	
A		REVISED SPEC.	5/29/14	AV/LL

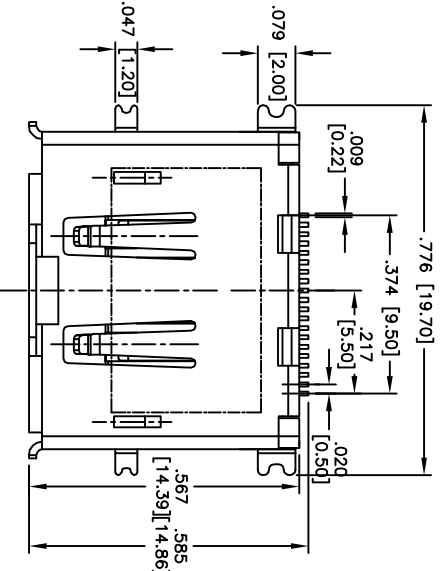

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0

Contact: Copper Alloy

Shell: Copper Alloy, nickel plated

Plating:

15u" Gold over Nickel underplate on contact area
 Tin plating on Solder Tail

Electrical:

Operating voltage: 40 VAC

Current rating: 0.5 Amps min

Conduct Resistance: 30 ohms max.

Insulation Resistance: 100M ohms min.

Withstanding Voltage: 500V AC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DISPLAYPORT RECEPTACLE, RA, SMT TYPE
 15u" SEL GOLD PLATED, W/ MOUNTING FLANG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		Holes	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	DY	11/11/09	
CHECKED			
APPROVED			
SIZE	PART NO.	REV	
X	DPC-F-S-RA-TSMT-MF-15	A	
REF:	S00013T	SCALE:	NTS
SHEET 1 OF 1			