

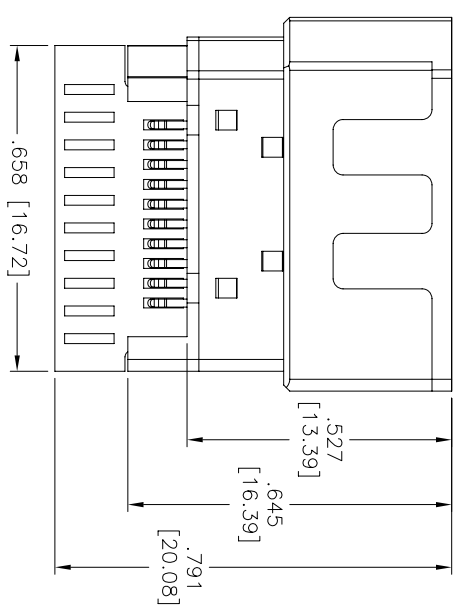
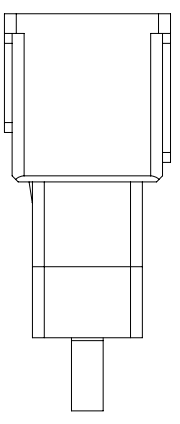


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/09/09	

APPROVED: _____
 DATE: _____ TITLE: _____

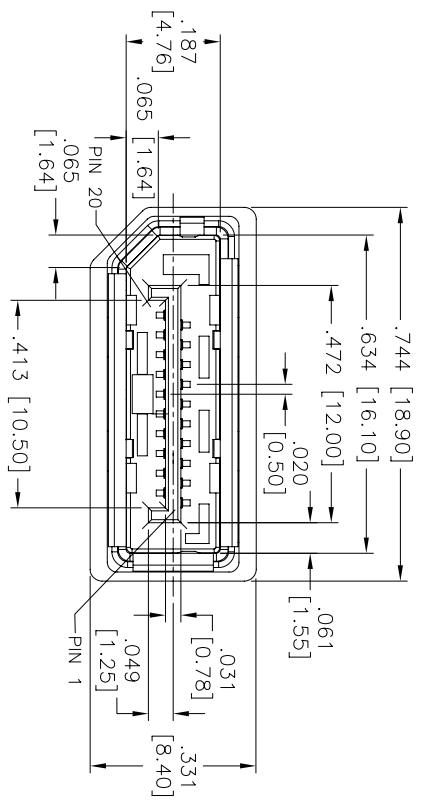

SPECIFICATIONS:
 Material: LCP, rated UL 94V-0
 Housing: LCP, rated UL 94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy, nickel plated
 Plating: 15u" Gold over Nickel underplate overall

Electrical:
 Operating voltage: 40 VAC
 Current rating: 0.5 Amps min
 Withstanding Voltage: 500V AC for 1 minute
 Insulation Resistance: 100M ohms min.
 Contact Resistance: 30 ohms max.
 Temperature Rating: -25°C to +85°C
 Operating temperature: -25°C to +85°C
 Environment: RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN DY	1/09/09
CHECKED	
APPROVED	

TITLE		DISP LAYPORT 20 PIN SOCKET SOLDER TYPE	
SIZE		15U" GOLD PLATED	
REF: S00106T	PART NO. DPC-F-SD-15	SCALE: NTS	REV. -