

6

5

4






3

2

1

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/15	
A		UPDATED DRAWING	3/11/15	HR/NP

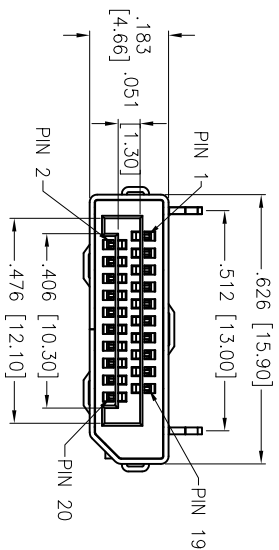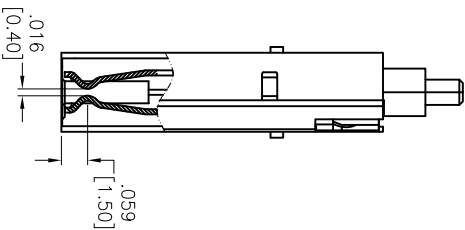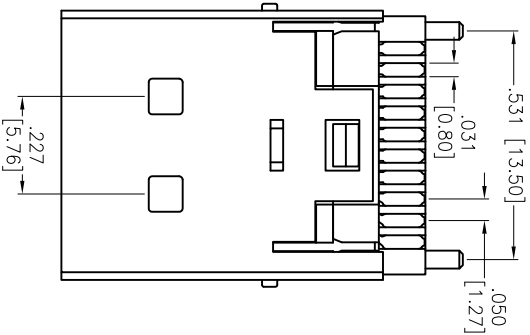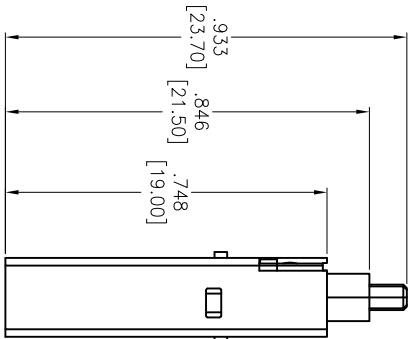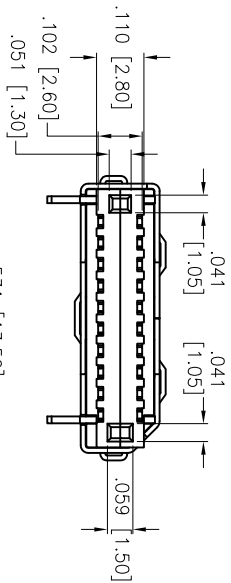

**SPECIFICATIONS:**

- Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shield: SPCC, Nickel plated
- Plating: Gold flash over Nickel underplate on contact area
- Electrical: Operating voltage: 40 VAC max
- Current rating: 0.5 Amps max
- Contact resistance: 30 mohms max
- Insulation resistance: 100 Mohms min
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DISPLAYPORT 20 PIN PLUG, ASSEMBLY TYPE  
 GOLD PLATED, SOLDER TYPE, NO LATCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	Ø:XXX ± .010
APPROVALS	DATE
DRAWN HR	1/26/15
CHECKED NP	1/26/15
APPROVED	

SIZE X	PART NO. DPC-M-SD-CS1-NL	REV. A
REF: S00075C	SCALE: NTS	SHEET 1 OF 1

A

B

C

D

A

B

C

D

6

5

4

3

2

1