



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/09	

APPROVED: _____
 DATE: _____ TITLE: _____

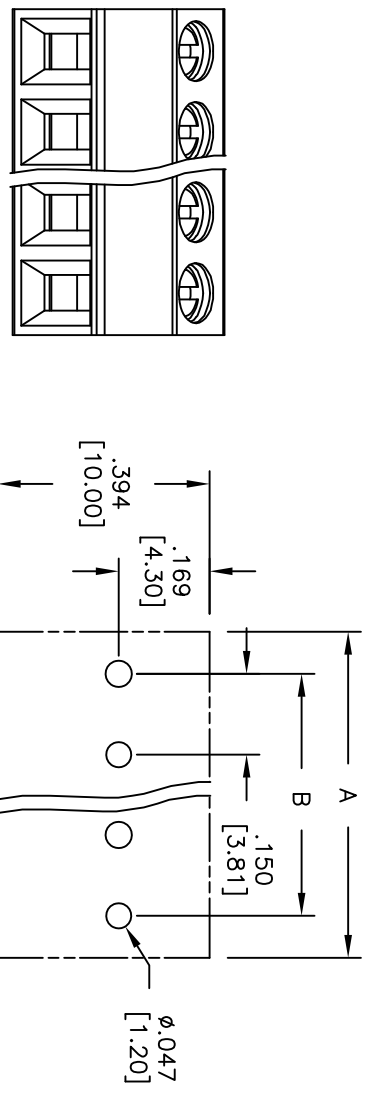

RECOMMENDED PCB LAYOUT

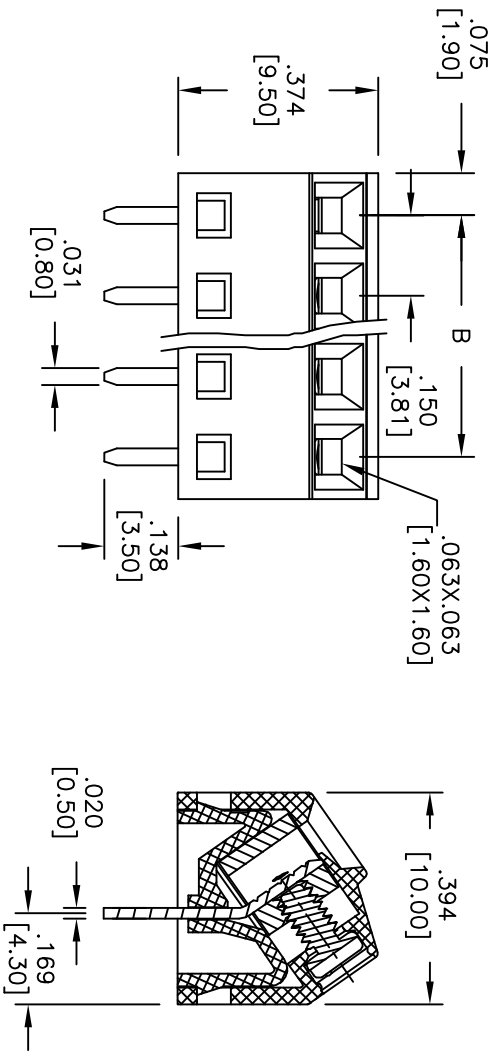

A = .150 [3.81] x No. of Positions
 B = .150 [3.81] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated.
 Clamp: Stainless Steel
 Screw: Steel, Zinc plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 10 Amps max per Pole
 Dielectric withstanding voltage: 1600 VAC for 1 minute
 Environmental:
 Operating temperature: -30°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X .XX .XXX	±.10 ±.020 ±.015
ØX ØXX ØXXX	±.10 ±.015 ±.010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**TERMINAL BLOCK, .150" [3.81] PITCH
 45 DEGREE ANGLE, PCB TYPE**

SIZE	PART NO.	REV.
X	EB11-XX-B	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1