
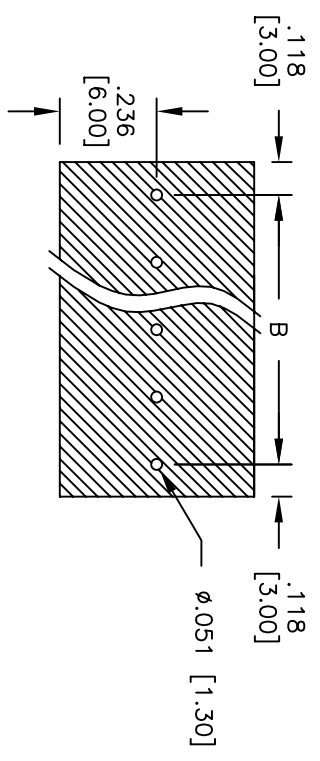
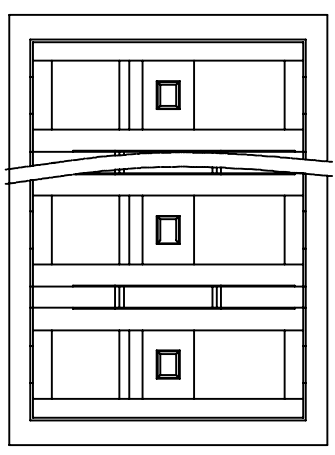


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

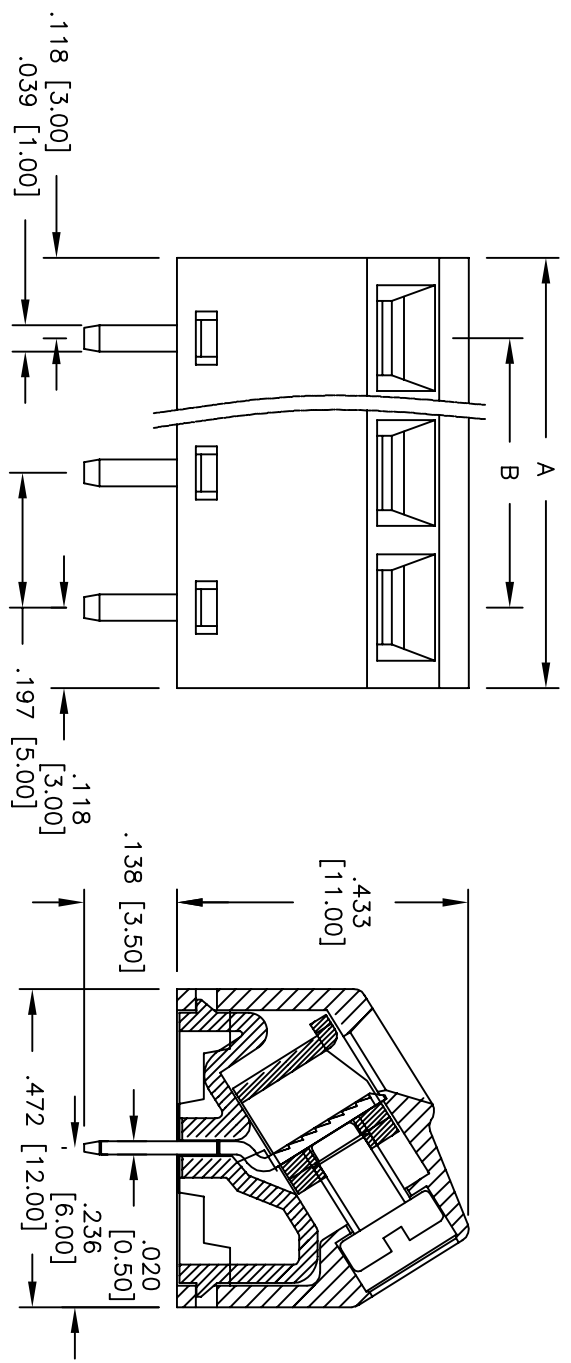

Recommended PCB Layout

A = .197 [5.00] x No. of Positions + .039 [1.00]  
 B = .197 [5.00] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: PA66, rated UL 94V-0
- Insulator color: Green
- Contact: Bronze, Tin plated.
- Screw: Steel
- Wire cage: Steel
- Electrical: Operation voltage: 300 VAC max
- Current rating: 13.5 Amps max per Pole
- Contact resistance: 20 mohms max
- Insulation resistance: 500 Mohms min @ DC500V
- Dielectric withstanding voltage: 1500 VAC for 1 minute
- Mechanical: Screw Torque: 5 Kgf-cm (max.)
- Wire Range: 14-30 Awg.
- Environmental: Operating temperature: -40°C to +105°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN: DY 9/10/08

CHECKED: \_\_\_\_\_

APPROVED: \_\_\_\_\_

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, PCB, 45 DEGREE ANGLE, .197" [5.00] PITCH**

SIZE	PART NO.	REV.
X	EB11-XX-C	-

SCALE: NTS SHEET 1 OF 1