
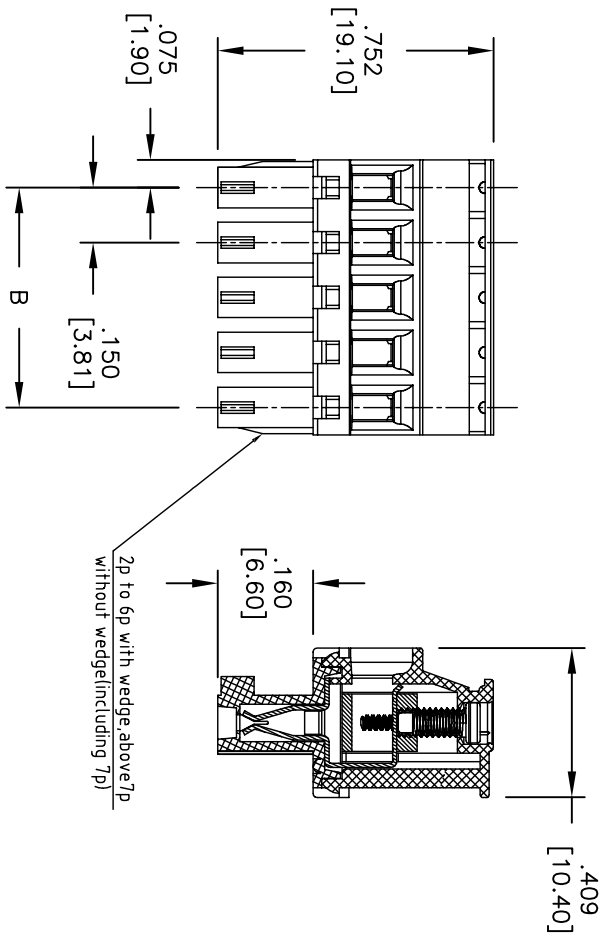


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/08	
A		REDRAWN	7/16/12	



Positions: 02 thru 20  
 A = .150 [3.81] x No. of Positions  
 B = .150 [3.81] x No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-16P	±.010 [0.25]
17-24P	±.012 [0.30]

2p to 6p with wedge above 7p  
 without wedge (including 7p)

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Clamp: Brass, Nickel plated  
 Screw: Steel, M2/Zn plated.  
 Contacts: Phosphor Bronze, Tin plated.  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 8 Amps  
 Withstanding Voltage: 1.6KV  
 Mechanical:  
 Solid wire(AWG): 16-28  
 Stranded wire(AWG): 16-28  
 Wire range: 1.5mm<sup>2</sup>  
 Torque(Lb-In): 1.7  
 Wire strip length(mm): 6-7  
 Temperature Rating:  
 Operating temperature: -40°C to +115°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN: DY 9/10/08  
 CHECKED: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, WITHOUT FLANGE STRAIGHT, .150" [3.81] PITCH**

SIZE	PART NO.	REV.
X	EB12-XX-B-SL	A
REF:	SM007T	SHEET 1 OF 1
SCALE:	NTS	