
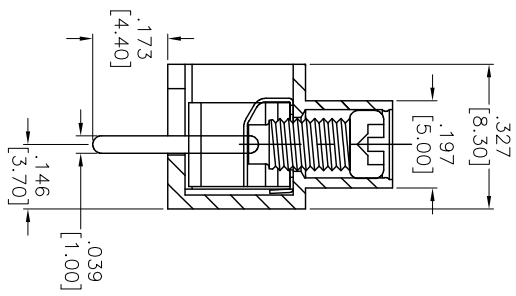
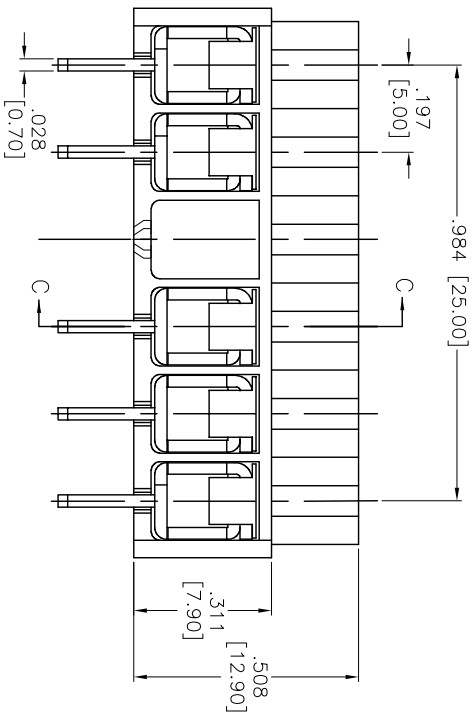
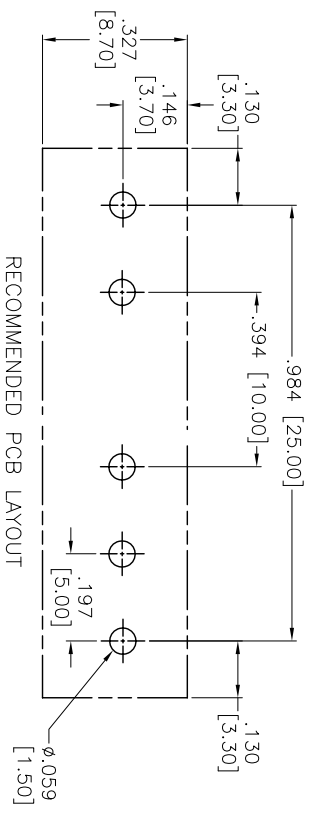


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/16/12	

APPROVED: _____
 DATE: _____ TITLE: _____

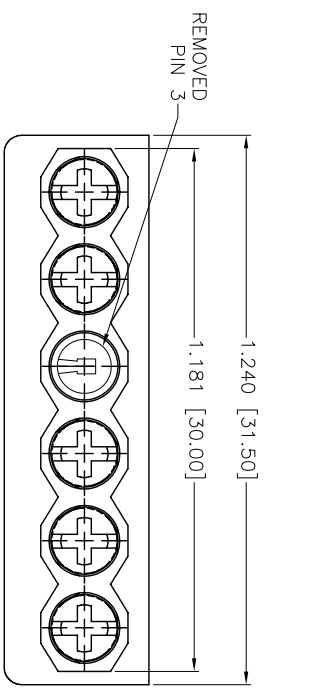

SECTION C-C

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Brass, Tin plated
- Screw: Steel, M3/Zn plated
- Electrical:
 - Operation voltage: 300 VAC
 - Current rating: 10 Amps
 - Withstanding Voltage: 1.6KV
- Mechanical:
 - Solid wire(AWG): 12-20
 - Stranded wire(AWG): 12-20
 - Torque(Lb-in): 3.5
 - Wire strip length(mm): 6-7
 - Temperature Rating: Operating temperature: -40°C to +115°C
 - Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .197 [5.00] PITCH
 6P, REMOVED PIN 3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		HOLES	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	AY	8/16/12		EURO BLOCK, .197 [5.00] PITCH	
CHECKED	LW	8/16/12		6P, REMOVED PIN 3	
APPROVED				PART NO. EB13-06-C-X03	
REF: S00007T		SCALE: NTS		SHEET 1 OF 1	