
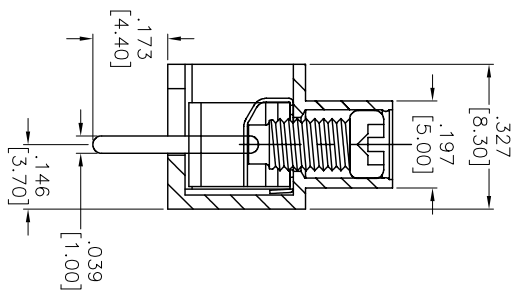
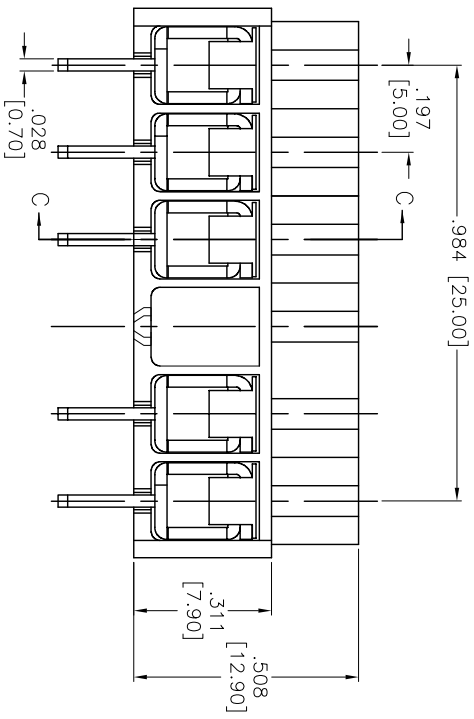


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/16/12	

APPROVED: _____
 DATE: _____ TITLE: _____

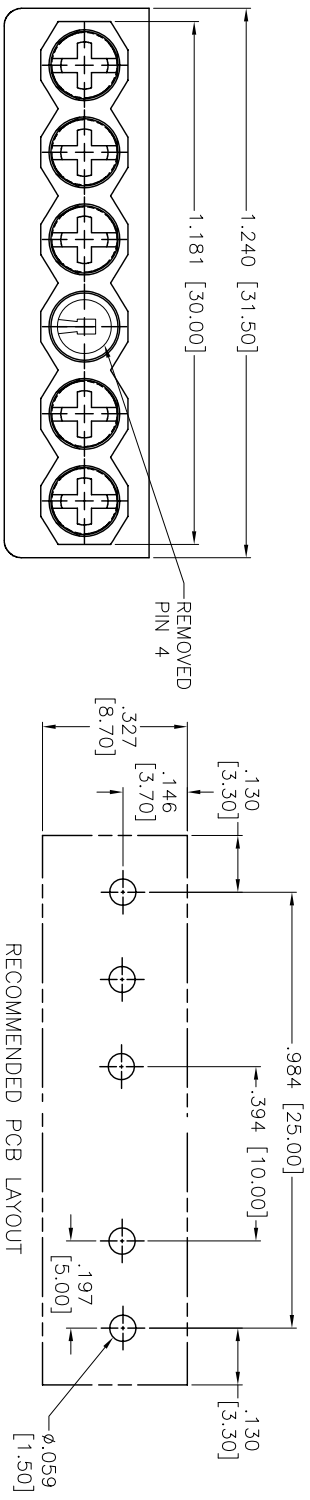

RECOMMENDED PCB LAYOUT

SECTION C-C

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Brass, Tin plated
- Screw: Steel, M3/Zn plated
- Electrical:
 - Operation voltage: 300 VAC
 - Current rating: 10 Amps
 - Withstanding Voltage: 1.6KV
- Mechanical:
 - Solid wire(AWG): 12-20
 - Stranded wire(AWG): 12-20
 - Torque(Lb-in): 3.5
 - Wire strip length(mm): 6-7
 - Temperature Rating: Operating temperature: -40°C to +115°C
- Environmental: Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	8/16/12
CHECKED LW	8/16/12
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .197 [5.00] PITCH
 PART NO. 6P, REMOVED PIN 4
 SIZE X
 REF: S00007T SCALE: NTS SHEET 1 OF 1

