
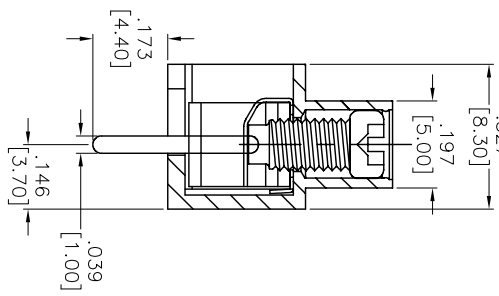
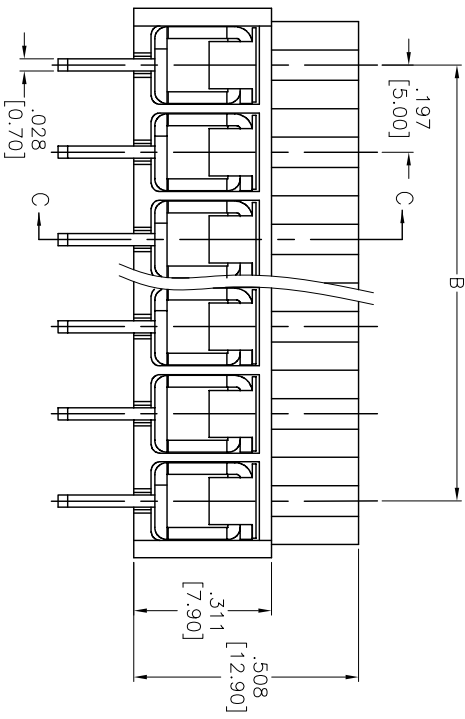
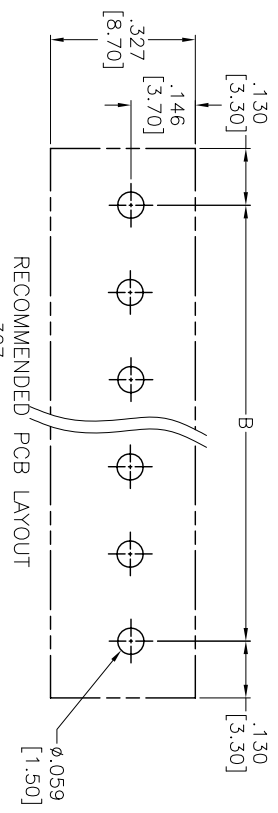


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/11/11	

APPROVED: _____
 DATE: _____ TITLE: _____

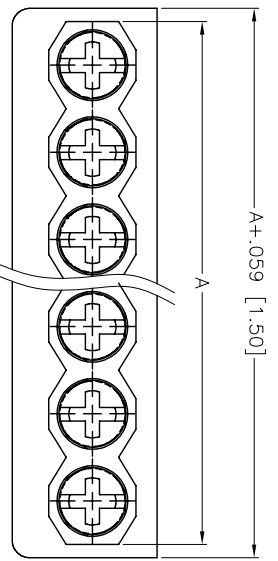

Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions
 B = .197 [5.00] x No. of Spoces

	DIM. A	DIM. B
2-6P	±.008 [0.20]	±.006 [0.15]
7-12P	±.010 [0.25]	±.008 [0.20]
13-18P	±.014 [0.35]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

SECTION C-C

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Wire guard: Stainless Steel
 Contact: Brass, Tin plated
 Screw: Steel, M3/Zn plated
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 10 Amps
 Withstanding Voltage: 1.6KV
 Mechanical:
 Solid wire(AWG): 12-20
 Stranded wire(AWG): 12-20
 Torque(Lb-in): 3.5
 Wire strip length(mm): 6-7
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	INCHES
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
ØX	±.10
ØXX	±.015
ØXXX	±.010
APPROVALS	DATE
DRAWN AY	12/1/11
CHECKED LW	12/1/11
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .197 [5.00] PITCH

TITLE	SIZE	PART NO.	REV.
	X	EB13-XX-C	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1	

