

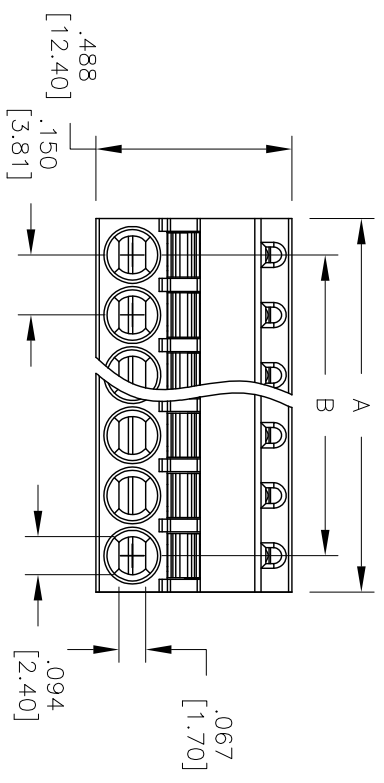


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/11	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

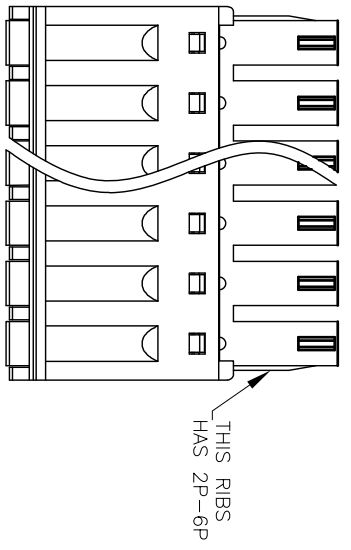

	Dim A	Dim B
2-6P	±.008 [0.20]	±.008 [0.20]
7-12P	±.010 [0.25]	±.010 [0.25]
13-18P	±.012 [0.30]	±.012 [0.30]
19-24P	±.016 [0.40]	±.014 [0.35]

Poles: 2 thru 24  
 A = .150 [3.81] X No. of Positions +.031 [0.80]  
 B = .150 [3.81] x No. of Spaces

**SPECIFICATIONS:**

**Material:**  
 Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Wire guard: Stainless Steel  
 Contact: Phosphor Bronze, Tin plated  
**Electrical:**  
 Operation voltage: 300 VAC  
 Current rating: 8 Amps  
 Solid wire (AWG): 16-28  
 Stranded wire (AWG): 16-28  
 Wire strip length: 5-6mm  
 Withstanding Voltage: 1.6KV  
**Environmental:**  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 250°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ±.10	±.10
.XX ±.020	±.015
.XXX ±.015	±.010
APPROVALS	DATE
DRAWN AY	10/21/11
CHECKED OC	10/21/11
APPROVED	

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, SPRING FOR PLUGGABLE,  
 3.81MM PITCH, COLOR: BLACK

REF: S00007T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------

6 5 4 3 2 1