
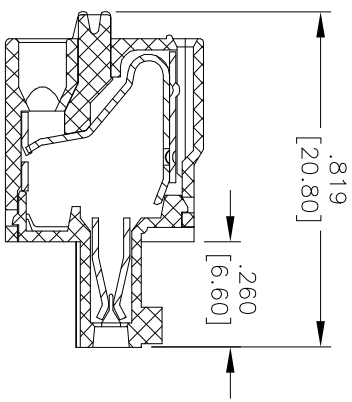
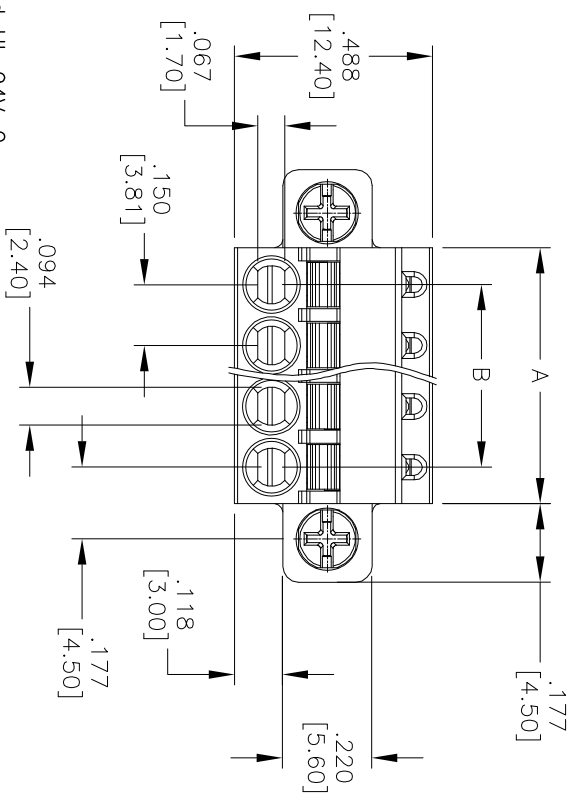


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 8/17/11 | |

APPROVED: _____

DATE: _____ TITLE: _____

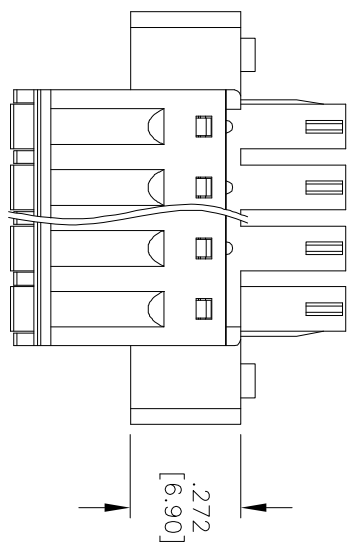

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Wire guard: Stainless Steel.

Contact: Phosphor Bronze, Tin plated.

Screw: M2.5, Steel, Zn plated.

Electrical:

Operation voltage: 300 VAC

Current rating: 8 Amps

Solid wire (AWG): 14-28

Stranded wire (AWG): 14-28

Wire strip length: 8-9mm

Withstanding Voltage: 1.6KV

Environmental:

Operating temperature: -40°C to +115°C

Lead free, RoHS compliant.

Recommended soldering temp: 250°C for 5 sec.



Poles: 2 thru 24
 A = .150 [3.81] X No. of Positions +.031 [0.80]
 B = .150 [3.81] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES

| | | | |
|------|--------|-------|--------|
| .X | ± .10 | ØXX | ± .10 |
| .XX | ± .020 | ØXXX | ± .015 |
| .XXX | ± .015 | ØXXXX | ± .010 |

APPROVALS

| | | |
|----------|----|---------|
| DRAWN | TW | 8/17/11 |
| CHECKED | AY | 8/17/11 |
| APPROVED | | |

ADAM TECH

909 Rehway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 EURO BLOCK, .150 [3.81] PITCH

| | | |
|-------------|--------------|--------------|
| SIZE | PART NO. | REV. |
| X | EB2-XX-M-B-E | - |
| REF: S0007T | SCALE: NTS | SHEET 1 OF 1 |