

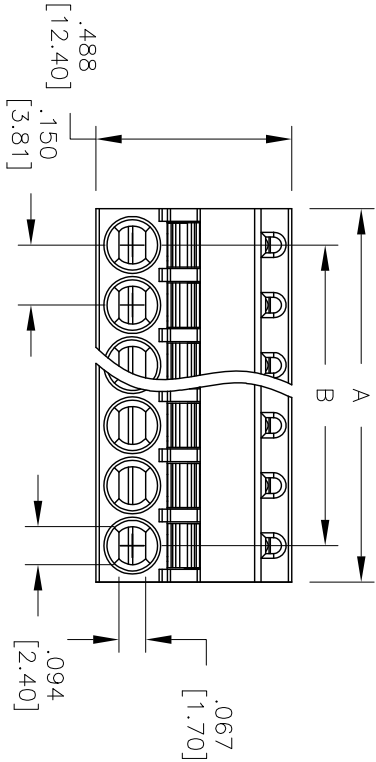


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

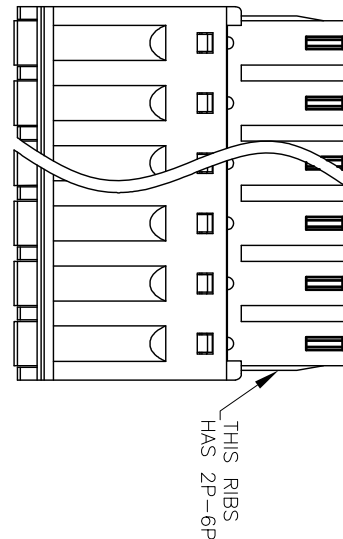

	Dim A	Dim B
2-6P	±.008 [0.20]	±.008 [0.20]
7-12P	±.010 [0.25]	±.010 [0.25]
13-18P	±.012 [0.30]	±.012 [0.30]
19-24P	±.016 [0.40]	±.014 [0.35]

Poles: 2 thru 24  
 A = .150 [3.81] X No. of Positions +.031 [0.80]  
 B = .150 [3.81] x No. of Spaces

**SPECIFICATIONS:**

Material: Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Wire guard: Stainless Steel  
 Contact: Phosphor Bronze, Tin plated  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 8 Amps  
 Solid wire (AWG): 16-28  
 Stranded wire (AWG): 16-28  
 Wire strip length: 5-6mm  
 Withstanding Voltage: 1.6KV  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 250°C for 5 sec.



Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	
A	9427	REDARW	8/17/11	

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, SPRING FOR PLUGGABLE,  
 3.81MM PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCES: EXCEPT AS NOTED		INCHES	
.X	±.10	ØX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXXX	±.010
APPROVALS	DATE		
DRAWN	DY	3/20/09	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	EB2-XX-M-B	A	
REF:	S00007T	SCALE:	NTS
		SHEET	1 OF 1