

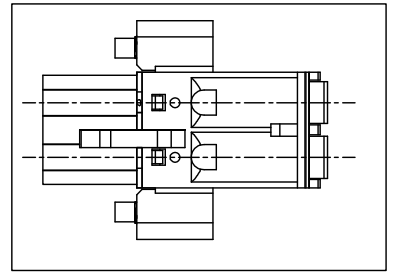


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

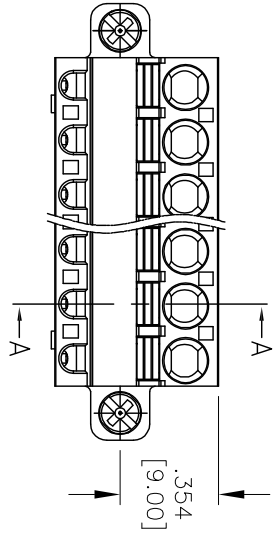

2P mark

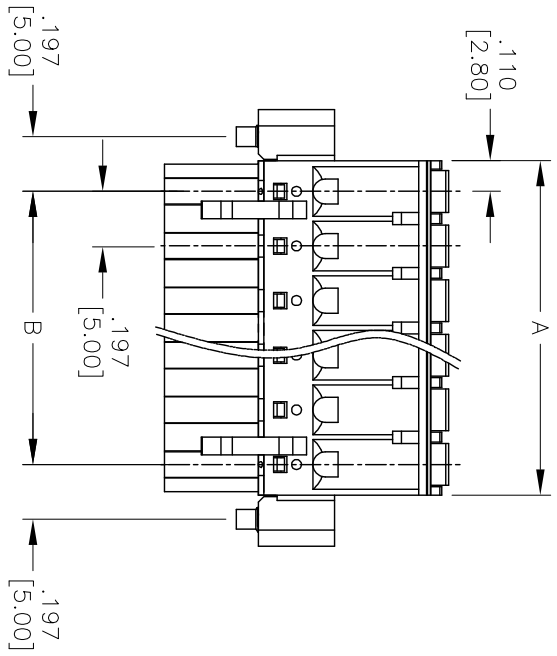

SECTION A-A

Poles: 2 thru 24  
 A = .197 [5.00] X No. of Positions +.024 [0.60]  
 B = .197 [5.00] X No. of Spaces

**SPECIFICATIONS:**  
 Material: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Wire guard: Stainless Steel  
 Contact: Phosphor Bronze, Tin plated.  
 Screw: M2.5, Steel, Zn plated.  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 10 Amps  
 Solid wire (AWG): 12-26  
 Stranded wire (AWG): 12-26  
 Wire strip length: 9-10mm  
 Withstanding Voltage: 1.6KV  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 250°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X .XX .XXX	±.10 ±.020 ±.015
ØXX ØXXX ØXXXX	±.10 ±.015 ±.010
APPROVALS	DATE
DRAWN TW	8/17/11
CHECKED AY	8/17/11
APPROVED	

<b>ADAM TECH</b>	
909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
TITLE	EURO BLOCK, .197 [5.00] PITCH
SIZE	PART NO.
X	EB2-XX-M-C-CSD-E
REF: S00007T	SCALE: NTS
SHEET 1 OF 1	REV.

6 5 4 3 2 1