
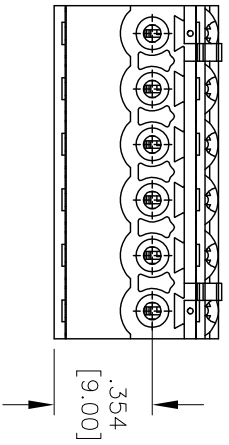
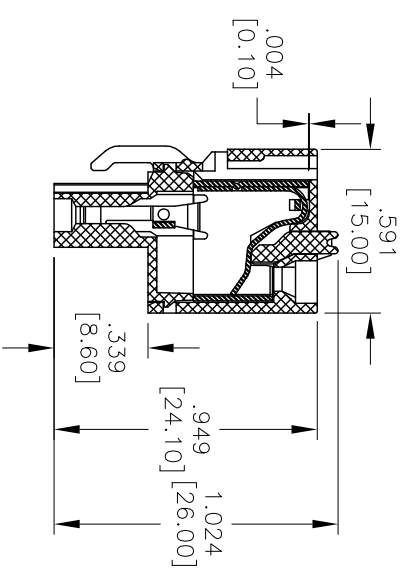
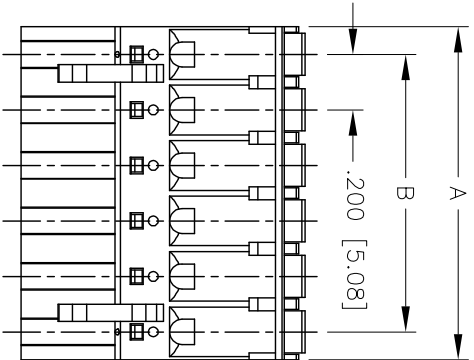


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/11	

APPROVED: _____
 DATE: _____ TITLE: _____

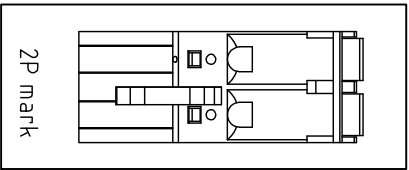

Poles: 2 thru 24
 A = .200 [5.08] X No. of Positions
 B = .200 [5.08] X No. of Spaces

SPECIFICATIONS:

- Material: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Phosphor Bronze, Tin plated
- Electrical:
 - Operation voltage: 300 VAC
 - Current rating: 10 Amps
 - Solid wire (AWG): 12-26
 - Stranded wire (AWG): 12-26
 - Wire strip length: 9-10mm
 - Withstanding Voltage: 1.6KV
- Environmental:
 - Operating temperature: -40°C to +115°C
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 250°C for 5 sec.



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, 200 [5.08] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN TW	8/17/11
CHECKED AY	8/17/11
APPROVED	

SIZE	PART NO.
X	EB2-XX-M-D-CSU
REF: S00007T	SCALE: NTS

REV.	SHEET 1 OF 1
------	--------------