
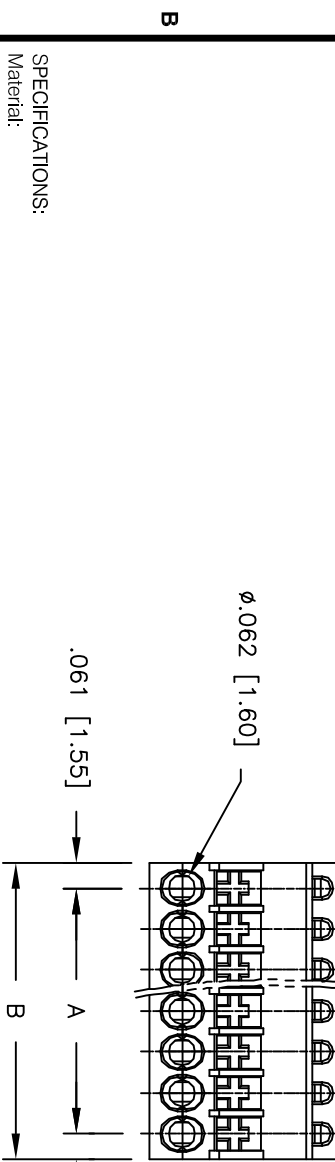


Rev	AWO #	Description	Date	Appr
-	7551	RELEASED	3/2/07	

APPROVED: _____
 DATE: _____ TITLE: _____

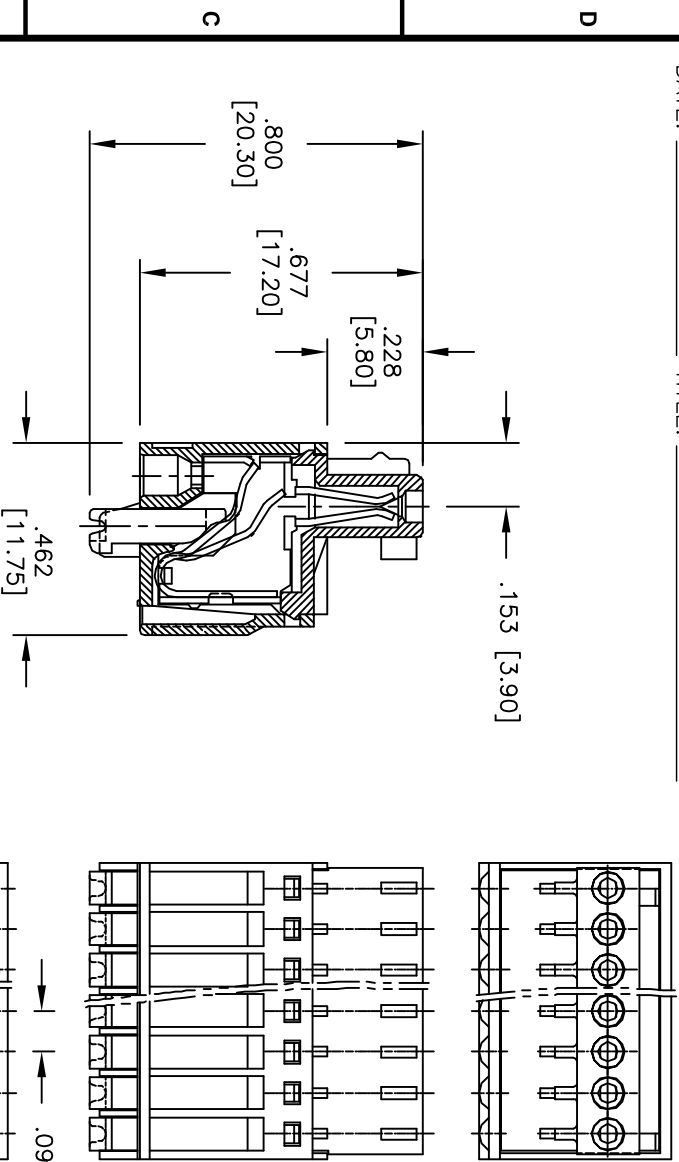

A = .098 [2.50] x No. OF POSITIONS -1
 B = .098 [2.50] x No. OF POSITIONS + .122 [3.10]

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Metal Housing: Brass
 Screw: Steel

Electrical:
 Operation voltage: 150 VAC max
 Current rating: 4 Amps max per Pole
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500V
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Wire Range: 20-28 Awg.

Environmental:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **EURO BLOCK, VERTICAL, 2.5mm PITCH,**

SIZE	PART NO.	REV.
X	EB2-XX-M-DV	-
REF:	S0002AT	SHEET 1 OF 1
SCALE:	NTS	

6 5 4 3 2 1