

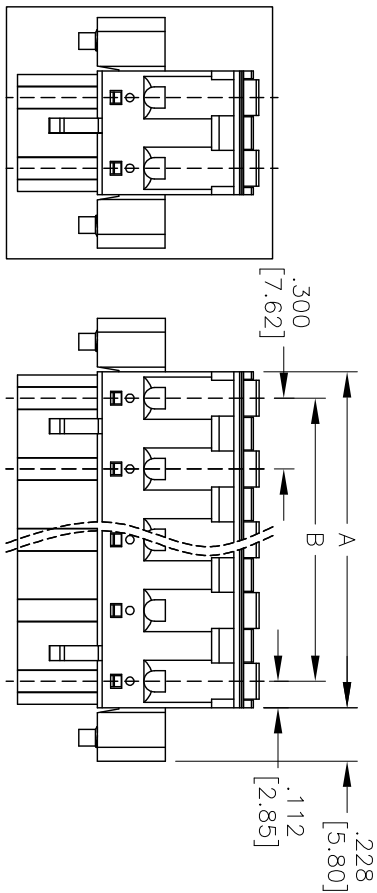
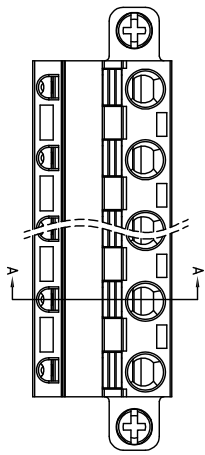


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

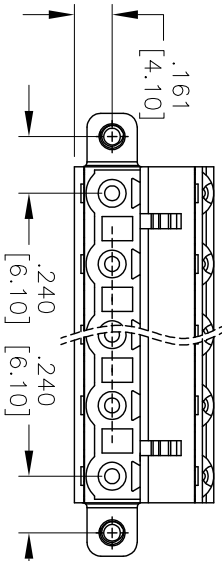

2P mark

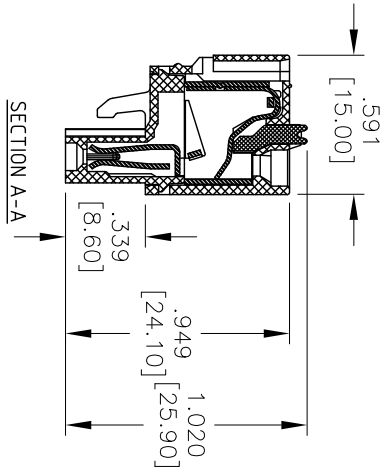

**SPECIFICATIONS:**

**Material:**

Insulator: Thermoplastic, rated UL 94V-0

Wire guard: Stainless Steel.

Contact: Phosphor Bronze, Tin plated.

Screw: M2.5, Steel, Zn plated.

**Electrical:**

Operation voltage: 300 VAC

Current rating: 10 Amps

Solid wire (AWG): 12-26

Stranded wire (AWG): 12-26

Wire strip length: 8-9mm

Withstanding Voltage: 1.6KV

**Environmental:**

Operating temperature: -40°C to +115°C

Lead free, RoHS compliant.

Recommended soldering temp: 250°C for 5 sec.

Poles: 2 thru 16  
 A = .300 [7.62] X No. of Spaces + .224 [5.70]  
 B = .300 [7.62] X No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, 300 [7.62] PITCH



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	HILES	EURO BLOCK, 300 [7.62] PITCH	
.X ± .10	ØXX ± .10	SIZE	PART NO.
.XX ± .020	ØXXX ± .015	X	EB2-XX-M-G-E
.XXX ± .015	ØXXXX ± .010	REF:	S00007T
APPROVALS	DATE	SCALE:	MTS
DRAWN TW	8/17/11	SHEET	1 OF 1
CHECKED AY	8/17/11	REV.	-
APPROVED			