
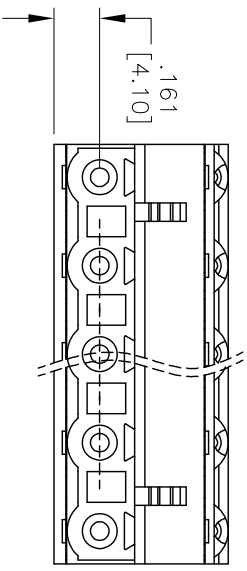
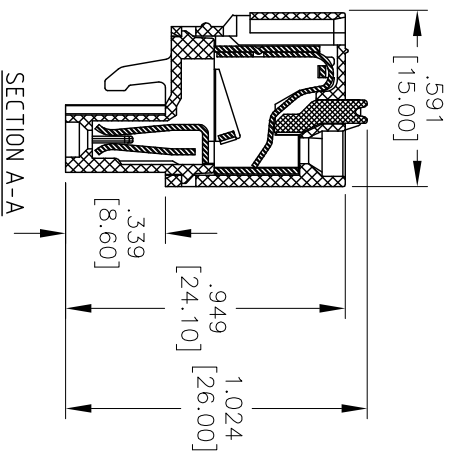
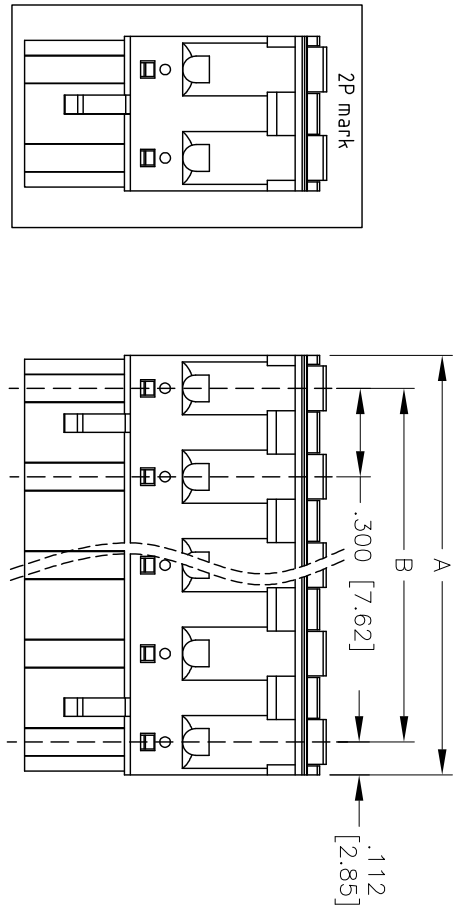


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

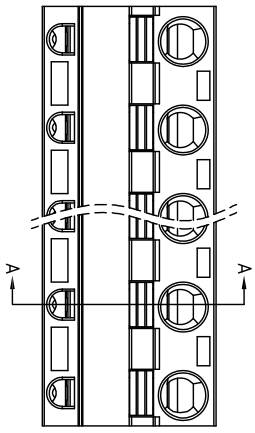

**SPECIFICATIONS:**

- Material: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Phosphor Bronze, Tin plated
- Electrical:
  - Operation voltage: 300 VAC
  - Current rating: 10 Amps
- Stranded wire (AWG): 12-26
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Environmental:
  - Operating temperature: -40°C to +115°C
  - Lead free, RoHS compliant.
  - Recommended soldering temp: 250°C for 5 sec.

Poles: 2 thru 16  
 A = .300 [7.62] X No. of Spaces + .224 [5.70]  
 B = .300 [7.62] X No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN	TW	8/17/11
CHECKED	AY	8/17/11
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, 300 [7.62] PITCH



SIZE	PART NO.	REV.
X	EB2-XX-M-G	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1