
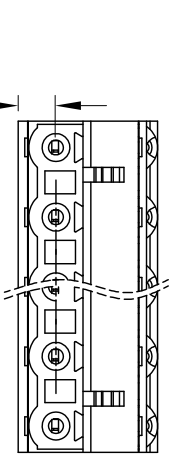
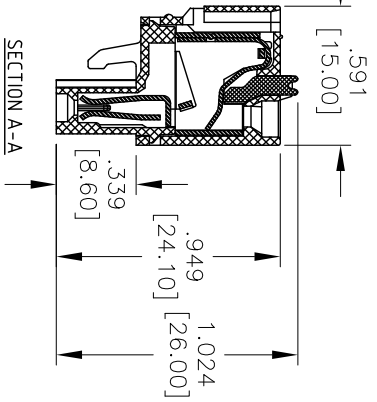

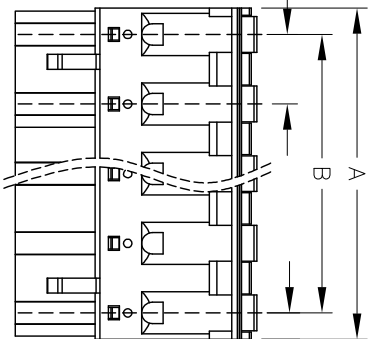


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



Poles: 2 thru 16  
 A = .295 [7.50] X No. of Spaces + .224 [5.70]  
 B = .295 [7.50] X No. of Spaces

**SPECIFICATIONS:**  
 Material: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Wire guard: Stainless Steel  
 Contact: Phosphor Bronze, Tin plated  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 10 Amps  
 Solid wire (AWG): 12-26  
 Stranded wire (AWG): 12-26  
 Wire strip length: 8-9mm  
 Withstanding Voltage: 1.6KV  
 Temperature Rating:  
 Operating temperature: -40°C to +115°C  
 Environmental:  
 Lead free, RoHS compliant.



**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, 295 [7.50] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLE
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN TW	8/17/11
CHECKED AY	8/17/11
APPROVED	

SIZE	PART NO.	REV.
X	EB2-XX-M-M	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1