
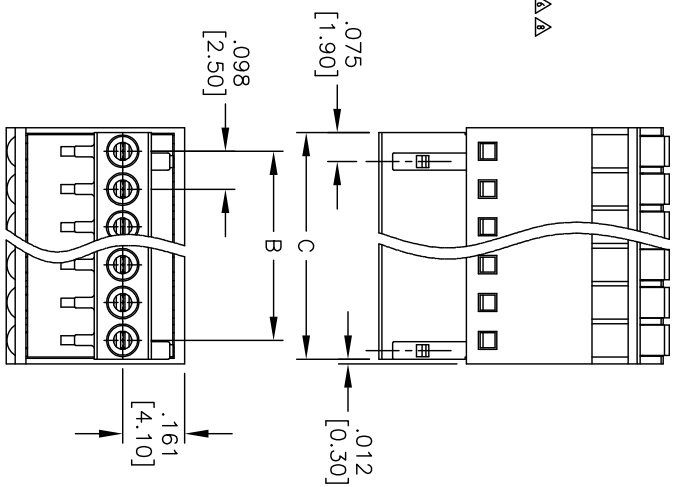
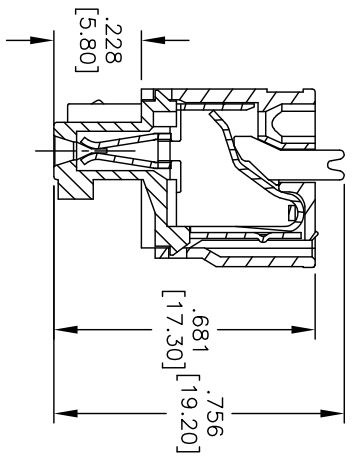
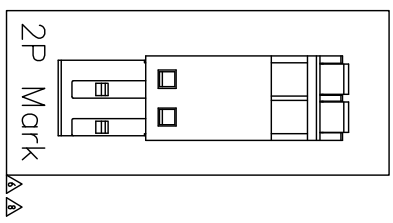


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/11	

APPROVED: _____ TITLE: _____
 DATE: _____

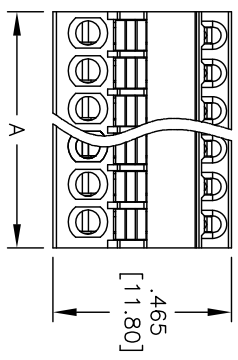

Positions: 2 thru 24
 A = .098 [2.50] x No. of (Poles-1) + .122 [3.10]
 B = .098 [2.50] x No. of (Poles-1)
 C = .098 [2.50] x No. of Poles

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, VERTICAL, .098 [2.50] PITCH

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Contact: Phosphor Bronze, Tin plated
- Wire guard: Stainless Steel
- Electrical: Operation voltage: 150 VAC
- Current rating: 4 Amps
- Solid wire (AWG): 20-28
- Stranded wire (AWG): 20-28
- Withstanding Voltage: 1.3kV
- Wire strip length: 7-8mm
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED		HOLES	
INCHES		Ø	
X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	AY	6/1/11	
CHECKED	AH	6/1/11	
APPROVED			

SIZE	PART NO.	REV.
X	EB2-XX-M-V	-
REF:	SCALE: NTS	SHEET 1 OF 1