
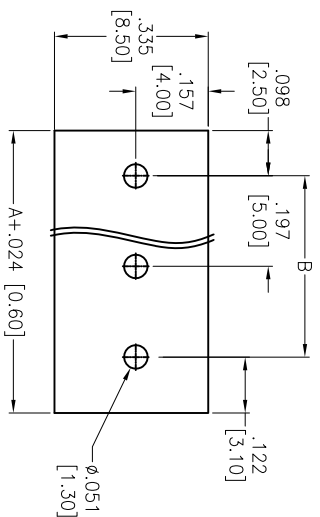




APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/14	
A		REVISED SHAPE	6/26/14	AY/SY

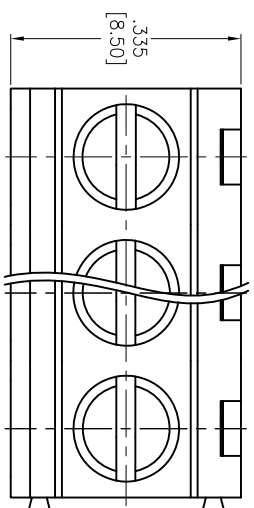

Poles: 2 thru 24  
 A = .197 [5.00] X No. of Positions  
 B = .197 [5.00] x No. of Spaces

**SPECIFICATIONS:**

- Material: PA66, rated UL 94V-0
- Insulator color: Green
- Screw: M2.5, Steel, Zinc plated.
- Contact: Brass, Tin plated.
- Cage: Brass, Nickel plated.
- Electrical:
  - Operation voltage: 300 VAC
  - Current rating: 8 Amps
  - Contact Resistance: 20 mohms max.
  - Insulation resistance: 500 Mohms min @DC, 1000V
  - Dielectric withstanding voltage: 2000 VAC for 1 minut
- Mechanical:
  - Torque: 0.4Nm(3.5lb-in)
  - Wire Range: 26-16 AWG 1.5mm<sup>2</sup>
  - Wire strip length: 6-7mm
- Environmental:
  - Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant.



**ADAM TECH**  
 900 Rodney Avenue, Union, NJ 07083  
 Phone: 908-987-9000 Fax: 908-987-9710

TITLE: EURO BLOCK, .197 [5.00] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS:	DATE:
DRAWN: AY	1/17/14
CHECKED: SY	1/17/14
APPROVED:	

SIZE: X	PART NO.: EB21A-XX-C	REV.:
REF: S00067C	SCALE: NTS	SHEET 1 OF 1