

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/28/14	

6

5

4





3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

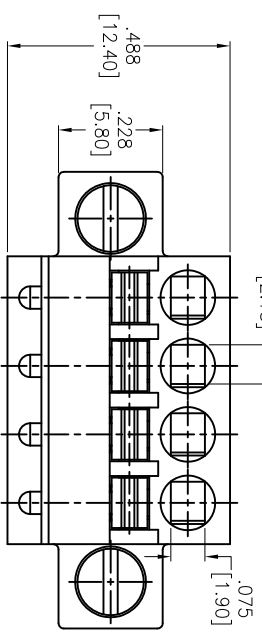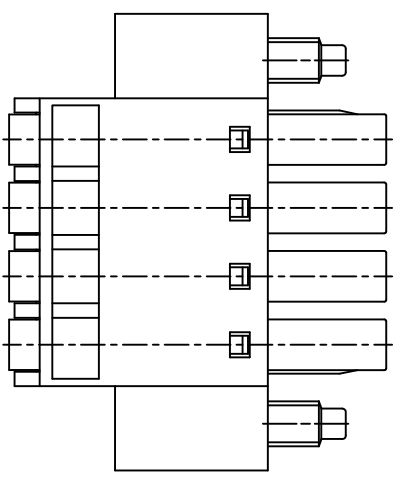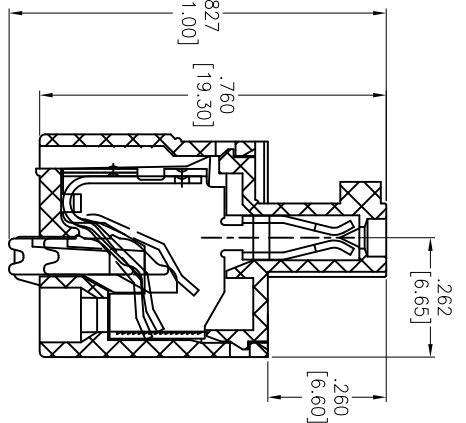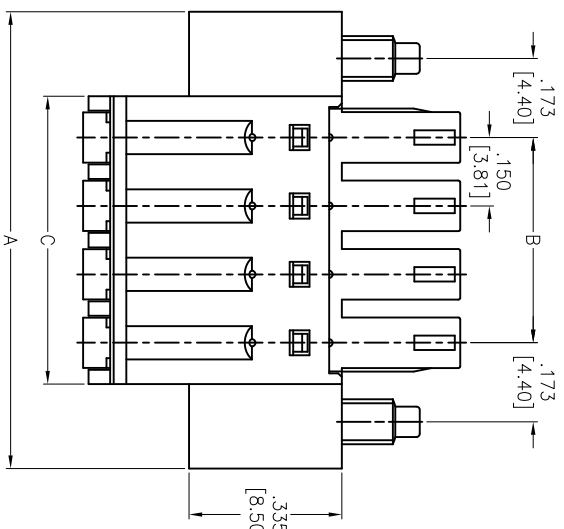

Poles: 02 thru 24  
 A = .150 [3.81] X No. of Positions + .031 [0.79]  
 B = .150 [3.81] x No. of Spaces  
 C = .150 [3.81] X No. of Positions + .401 [10.19]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .150 [3.81] PITCH, w/ MOUNTING EARS

**SPECIFICATIONS:**  
 Material: PA66, rated UL 94V-0  
 Insulator color: Green  
 Clamp: Phosphor Bronze, Nickel plated  
 Screw: M2.5, Steel, Zinc plated  
 Shrapnel: Stainless Steel  
 Electrical:  
 Operation voltage: 300 V max  
 Current rating: 8 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 2,000 VAC for 1 minute  
 Wire range: 28-16 AWG, 1mm<sup>2</sup>  
 Wire strip length: 7-8mm  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DATE	DATE
HR	3/28/14
CHECKED	SY
APPROVED	

DRAWN	HR	3/28/14
CHECKED	SY	3/28/14
APPROVED		

SIZE	PART NO.	REV.
X	EB2A-XX-M-B-E	-
REF:	S00067C	SHEET 1 OF 1

6

5

4

3

2

1