

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/11/15	

6

5

4

3


2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_


D




.098  
[2.50]

.154  
[3.90]

C

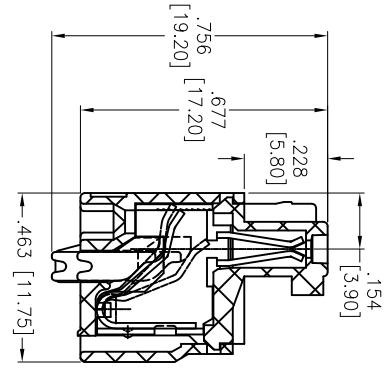



.756 [19.20]  
.677 [17.20]




A

B

C



B

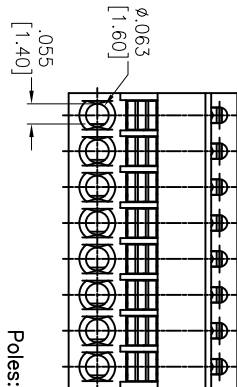

∅.063  
[1.60]

.055  
[1.40]

Poles: 02 thru 24  
A = .098 [2.50] X No. of Positions  
B = .098 [2.50] X No. of Spaces  
C = .098 [2.50] X No. of Positions + .024 [0.60]

**SPECIFICATIONS:**

- Material: Insulator: PA66, rated UL 94V-0
- Insulator color: Green
- Clamp: Phosphor Bronze, Nickel plated
- Wire guard: Stainless Steel
- Electrical: Operation voltage: 150 V
- Current rating: 5 A
- Contact resistance: 20 mohms max
- Insulation resistance: 500 Mohms min @ 500 VDC
- Mechanical: Wire range: 26-20 AWG, 0.5mm<sup>2</sup>
- Wire strip length: 8mm
- Environmental: Lead free, RoHS compliant.

A

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, 138 [2.50] PITCH

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅XX	± .10
.XX	± .020	∅XXX	± .015
.XXX	± .015	∅XXX	± .010

DRAWN		DATE	
HR	NP	3/11/15	
CHECKED		DATE	
NP		3/11/15	
APPROVED		DATE	

SIZE	PART NO.	REV.
X	EB2A-XX-M-V	-
REF: S00067C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

