Rev	AWO #	Description	Date	Appr
-	7551	RELEASED	3/2/07	

APPROVED: _____

DATE: _____ TITLE: _____

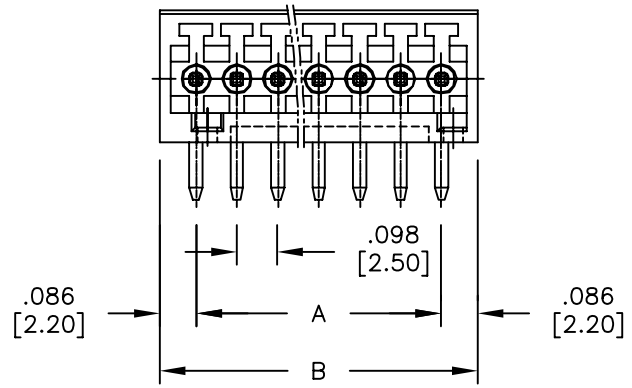

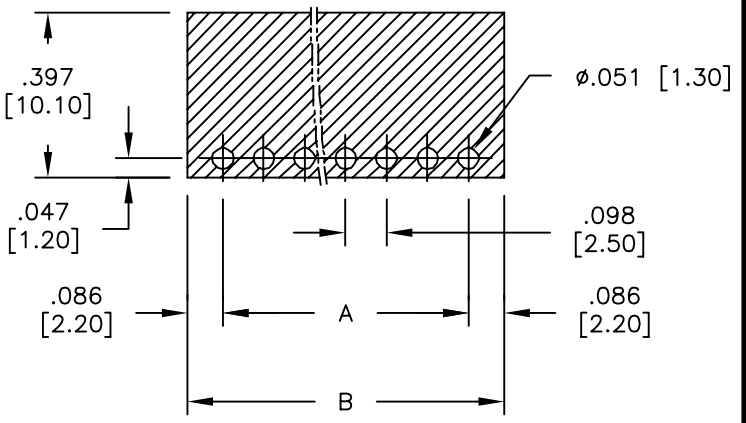

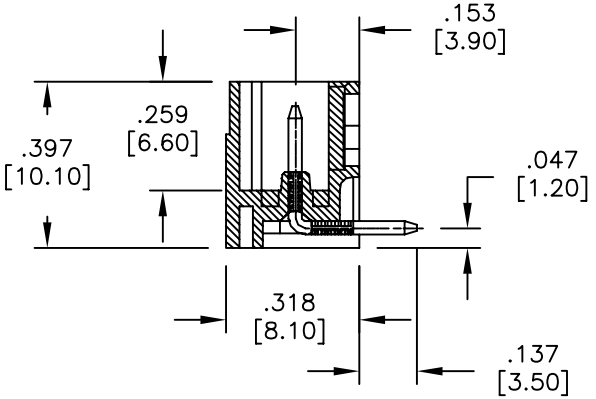

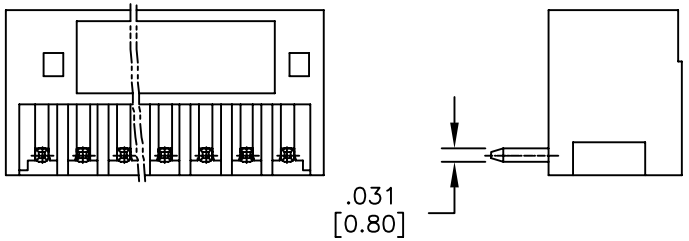



P.C.B. LAYOUT

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Metal Housing: Copper
Screw: Steel
Electrical:
Operation voltage: 150 VAC max
Current rating: 4 Amps max per Pole
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ 500V
Dielectric withstanding voltage: 1500 VAC for 1 minute
Wire Range: 20-28 Awg.
Environmental:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

A = .098 [2.50] x No. OF POSITIONS -1
B = .098 [2.50] x No. OF POSITIONS + .173 [4.40]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	3/2/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, VERTICAL, 2.5mm PITCH,

SIZE	PART NO.	REV.
X	EB3-12-M-C-DV	-

REF: | SCALE: NTS | SHEET 1 OF 1